

## ENVIRONMENTAL PRODUCT DECLARATION

In accordance with ISO 14025

Owner of the declaration  
Program holder and publisher  
Declaration number  
Issue date  
Valid to

Helland Møbler AS  
The Norwegian EPD Foundation

### Nordia 3 - seater.

Product

**HELLAND**<sup>®</sup>

### Helland Møbler AS

Manufacturer



## General information

### Product

Nordia 3 - seater.

### Owner of the declaration:

Helland Møbler AS  
 Contact person: Øyvind Tafjord  
 Phone: +47 416 60 163  
 E-mail: oyvind.tafjord@helland.no

### General Information

The Norwegian EPD Foundation  
 Post Box 5250 Majorstuen, 0303 Oslo  
 Phone: +4723088000  
 e-mail: post@epd-norge.no

### Manufacturer

Helland Møbler AS

### Declaration number:

### Place of production:

90437 Läännemaa + Kadaka Tee 179B, Tallinn, Estonia.

### This declaration is based on Product Category Rules:

NPCR 003: 2015 Version 2.1.seating

### Management system:

ISO 14001: 2014 Certificate no. 901085  
 From the accredited unit: Nemko AS, Norway

### Declared unit:

Nordia 3 - seater.

### Org. No:

NO 94 35 11 128 MVA

### Declared unit with option:

Available with removable seat and cover.  
 Delivered with low or high back.

### Issue date:

### Functional unit:

Production of the chair provided and maintained  
 for a period of 15 years.

### Valid to:

### This EPD has been worked out by:

The declaration has been developed using Furniture  
 EPD Tool Version 1.4.3., Approval: NEPDT04  
 Company specific data collected and registered by:  
**Oddrun Aunet Innselset**  
 Company specific data audited by:  
**Øyvind Tafjord**

### Comparability:

EPDs from programmes other than the Norwegian  
 EPD Foundation may not be comparable

### Year of study:

### Verification:

Independent verification of data, other environmental  
 information and EPD has been carried out in  
 accordance with ISO14024, 8.1.3. and 8.1.4.

Approved

externally



Mie Vold, Senior Research Scientist  
 (Independent verifier approved by EPD Norway)

Håkon Hauan  
 Manager EPD-Norway

Key environmental indicators	Unit	Cradle to Gate A1-A3
Global warming	kg CO <sub>2</sub>	36
Total energy use	MJ	710
Amount of recycled materials	%	49 %

**Product**

**Product Description and Application**

Nordia 3 - seater is delivered in birch or oak. Available with removable cover on seat and back. Delivered with low or high back.

**Technical Data**

Total weight: 38,20 kg with packaging. Dimensions: H79 W193 D79. Seat height: 46 cm


**Market**

Europe and USA

**Reference Service Life**

15 years

Materials			Recycled material in manufactured product		Recyclable material at end of product life	
Unit	kg	%	%	kg	%	kg
Steel	14,24	37 %	100 %	14,24	100 %	14,24
Wood	8,90	23 %	0 %	0,00	0 %	0,00
Polyethylene	6,50	17 %	0 %	0,00	100 %	6,50
Packaging	6,14	16 %	76 %	4,67	100 %	6,14
Textiles	1,60	4 %	0 %	0,00	0 %	0,00
Paint	0,82	2 %	0 %	0,00	100 %	0,82
<b>Total</b>	<b>38,20</b>		<b>49 %</b>		<b>73 %</b>	

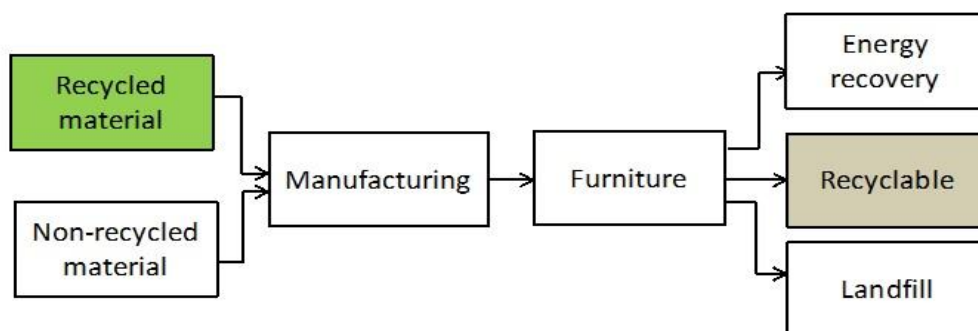

Product manufactured from 49% recycled material  
 At end of life product contains 73% recyclable material


## LCA: Calculation rules

### Declared Unit

Nordia 3 - seater.

### System Boundary

Life cycle stages included are described in figure and through the corresponding letter and number designations in the

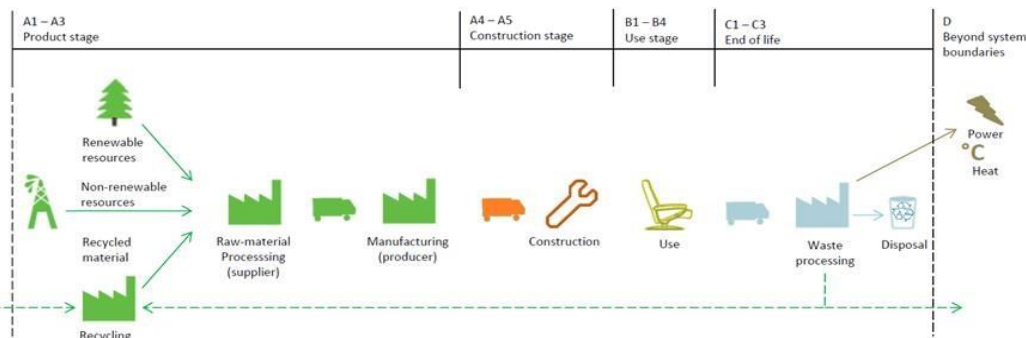

### Data quality

Specific manufacturing data from 2014 are used. Data from Ecoinvent 3.0.1 and Østfoldforskning database are used as the basis for raw energy carrier production. See (6)

### Cut-off criteria

All major raw materials and all the essential energy is included. The production processes for raw materials and energy flows that are included with very small amounts (<1%) are not included. This cut-off rule does not apply for hazardous materials and substances

### Allocation

Where virgin materials are used, emissions and energy consumption connected with extraction and production are included.

Where recycled materials are used in the product, emissions and energy consumption related to the recycling process are included.

Emissions from incineration are allocated to the product system that uses the recovered energy.

Emissions from incineration of waste are allocated to the product system that uses the recovered energy.

## LCA: Scenarios and additional technical information

Transportation to an average customer in Copenhagen is 1000 km (A4: average European lorry > 32 tonnes)

The use stage (B1) is represented by a scenario and includes vacuum cleaning of textile once a month. The PCR does not provide detailed guidelines for what should be included in the use stage. In the end of life stage, the transport distance for waste to waste processing is 72 km (C1). The reuse, recovery and recycling stage is beyond the system boundaries (D). It is assumed that the solution is dismantled and the materials recycled or combusted according to general Norwegian treatment of industrial waste (see the table below). This calculation includes only CO2 emissions (GWP) in the C-modules. The transport distance to reuse, recovery or recycling varies for each material, but the average distance is 373 km. The vehicles used and associated data are described in detail in [5].

	Material recovery	Energy recovery	Disposal
Aluminium	70,1 %	0,0 %	30 %
Steel	70,1 %	0,0 %	30 %
Plastic	64,3 %	30,8 %	5 %
Cardboard	94,5 %	5,5 %	0 %

## LCA: Results

The following information describe the scenarios in the different modules of the EPD.

System boundaries (X=included, MND=modul not declared, MNR=modul not relevant)

Product stage			Construction stage		Use stage				End of life			Beyond the system boundaries
Raw materials	Transport	Manufacturing	Transport	Construction	Maintenance	Repair	Replacement	Operational energy use	Transport	Waste Processing	Disposal	Reuse-recovery-recycling potential
A1	A2	A3	A4	A5	B1	B2	B3	B4	C1	C2	C3	D
x	x	x	x	MNR	x	MNR	MNR	MNR	x	x	x	x

## Environmental impact (INA = Indicator Not Assessed)

Parameter	A1	A2	A3	A1-A3	A4	B1	C1	C2	C3	C1-C3	D
GWP	31,8	4,4	0,1	36,2	0,0	0,0	2,8	21,3	2,5	26,6	-18,3
ODP	2,0E-06	7,9E-07	2,0E-08	2,8E-06	0,0	0,0	INA	INA	INA	INA	0,0E+00
POCP	1,0E-02	7,3E-04	1,9E-05	1,1E-02	0,0	0,0	INA	INA	INA	INA	0,0E+00
AP	0,1	1,6E-02	4,5E-04	0,2	0,0	0,0	INA	INA	INA	INA	0,0E+00
EP	0,1	3,9E-03	9,7E-05	0,1	0,0	0,0	INA	INA	INA	INA	0,0E+00
ADPM*	4,8E-05	1,7E-05	3,2E-07	6,6E-05	0,0	0,0	INA	INA	INA	INA	0,0E+00
ADPE	394,1	68,8	1,7	464,6	0,0	0,0	INA	INA	INA	INA	-390,9

GWP Global warming potential (kg CO<sub>2</sub>-eqv.); ODP Depletion potential of the stratospheric ozone layer (kg CFC11-eqv.); POCP Formation potential of tropospheric photochemical oxidants (kg C<sub>2</sub>H<sub>4</sub>-eqv.); AP Acidification potential of land and water (kg SO<sub>2</sub>-eqv.); EP Eutrophication potential (kg PO<sub>4</sub>-3-eqv.); ADPM Abiotic depletion potential for non fossil resources (kg Sb -eqv.); ADPE Abiotic depletion potential for fossil resources (MJ);

\* Some processes use Ecoinvent 3.0.1. and thus data on renewable resources is omitted. The true ADPM, RPEE, RPEM and TPE may be higher than indicated. This issue will be addressed in a new version of Ecoinvent 3, data from which was not available when this declaration was prepared.

## Resource use (INA = Indicator Not Assessed)

Parameter	A1	A2	A3	A1-A3	A4	B1	C1	C2	C3	C1-C3	D
RPEE*	155,6	1,0	2,4E-02	156,6	0,0	0,0	INA	INA	INA	INA	0,0
RPEM*	202,3	0,2	5,3E-03	202,5	0,0	0,0	INA	INA	INA	INA	0,0
TPE*	357,9	1,2	3,0E-02	359,2	0,0	0,0	INA	INA	INA	INA	0,0
NRPE	481,4	70,3	1,8	553,4	0,0	0,0	INA	INA	INA	INA	0,0
NRPM	0,0	0,0	0,0	0,0	0,0	0,0	INA	INA	INA	INA	0,0
TNRPE	481,4	70,3	1,8	553,4	0,0	0,0	INA	INA	INA	INA	0,0
SM	23,2	0,0	0,0	23,2	0,0	0,0	INA	INA	INA	INA	0,0
RSF	0,0	0,0	0,0	0,0	0,0	0,0	INA	INA	INA	INA	0,0
NRSF	0,0	0,0	0,0	0,0	0,0	0,0	INA	INA	INA	INA	0,0
W	0,0	0,0	0,0	0,0	0,0	0,0	INA	INA	INA	INA	0,0

RPEE Renewable primary energy resources used as energy carrier (MJ); RPEM Renewable primary energy resources used as raw materials (MJ); TPE Total use of renewable primary energy resources (MJ); NRPE Non renewable primary energy resources used as energy carrier (MJ); NRPM Non renewable primary energy resources used as materials (MJ); TNRPE Total use of non renewable primary energy resources (MJ); SM Use of secondary materials (kg); RSF Use of renewable secondary fuels (MJ); NRSF Use of non renewable secondary fuels (MJ); W Use of net fresh water (m<sup>3</sup>);

## End of life - Waste and Output flow (INA = Indicator Not Assessed)

Parameter	A1	A2	A3	A1-A3	A4	B1	C1	C2	C3	C1-C3	D
HW	5,3E-03	4,4E-05	9,6E-07	5,3E-03	0,0	0,0	INA	INA	INA	INA	0,0
NHW	9,8	3,0	0,1	13,0	0,0	0,0	INA	INA	INA	INA	0,0
RW	0,0	0,0	0,0	0,0	0,0	0,0	INA	INA	INA	INA	0,0
CR	0,0	0,0	0,0	0,0	0,0	0,0	INA	INA	INA	INA	0,0
MR	1,9E-02	0,0	0,0	1,9E-02	0,0	0,0	INA	INA	INA	INA	0,0
MER	0,0	0,0	0,0	0,0	0,0	0,0	INA	INA	INA	INA	0,0
EEE	0,0	0,0	0,0	0,0	0,0	0,0	INA	INA	INA	INA	0,0
ETE	0,0	0,0	0,0	0,0	0,0	0,0	INA	INA	INA	INA	0,0

HW Hazardous waste disposed (kg); NHW Non hazardous waste disposed (kg); RW Radioactive waste disposed (kg); CR Components for reuse (kg); MR Materials for recycling (kg); MER Materials for energy recovery (kg); EEE Exported electric energy (MJ); ETE Exported thermal energy ( MJ);

## Specific Norwegian requirements

### Electricity

The electricity consumed is assumed to be from East pool mix in the East European countries. European mix and energy mix in Estonia is based on data from the woid bank. (Based on data 2011)

Electricity mix: 0,053 kg CO2 eqv/ MJ (East europen mix)

### Dangerous Substances

None of the following substances have been added to the product: Substances on the REACH Candidate list of substances of very high concern (of 17.12.2014) and substances that lead to the product being classified as hazardous waste.

The chemical content of the product complies with regulatory levels as given in the Norwegian Product Regulations.

REACH = Registration - Evalution - Authorisation - Chemicals - Restriction

### Indoor Environment

Our furniture does not contian any substances that affects indoor climate

### Climate Declaration

Not relevant

## Additional environmental information

Key environmental indicators for variants : Cradle to gate analyse from A1 to A3 (packaging included)

Variant model addition option:	Global warming(kg CO2)	Total energyuse (MJ)	material in product
Nordia 1-seater with low back	16,00	300	40 %
Nordia 2-seater with low back	25,00	496	47 %

## Bibliography

[1] NS-EN ISO 14025:2006, Environmental labels and declarations-Type III environmental declarations-Principles and procedures.



[2] NS-EN ISO 14044:2006, Environmental management - Life cycle assessment - Requirements and guidelines

[3] EN 15804:2012 + A1:2013 Sustainability of construction works - Environmental product declaration - Core rules for the product category of construction products

[4] Product category rules (PCR) for preparing an environmental product declaration for:  
Product Group Seating Solution NPCR 003: 2015; Product Group Plate Furniture NPCR 021: 2012

[5] Raadal, H. L., Modahl, I. S., Lyng, K. A. (2009). Klimaregnskap for avfallshåndtering, Fase I og II. OR 18.09.  
ISBN : 978-82-7520-611-2, 82-7520-611-1

[6] Brekke, A., Møller, H., Baxter, J., Askham, C. (2014). Verktøy - miljødeklarasjon for møbel  
Dokumentasjon som grunnlag for verifisering, Ostfold Research

	Program Holder and Publisher The Norwegian EPD Foundation Post Box 5250 Majorstuen, 0303 Oslo Norge	Phone: +4723088292 email: post@epd-norge.no web: www.epd-norge.no
	Owner of the Declaration Helland Møbler AS Postboks 10 6259 Stordal	Phone: +47 702 79 000 email: helland@helland.no web: www.helland.no
	Author of the Life Cycle Assessment Østfoldforskning AS Stadion 4 1671 Kråkerøy	Phone: +4769351100 email: post@ostfoldforskning.no web: www.ostfoldforskning.no