ENVIRONMENTAL PRODUCT DECLARATION

in accordance with ISO 14025, ISO 21930 and EN 15804

Owner of the declaration:

Program operator:

Publisher:

Declaration number:

Registration number:

ECO Platform reference number:

Issue date:

Valid to:

Jotun A/S

The Norwegian EPD Foundation

The Norwegian EPD Foundation

NEPD-3773-2711-EN

NEPD-3773-2711-EN

30.09.2022

30.09.2027

Jotafloor Non Slip Aggregate, Jotun U.A.E. Ltd. (L.L.C.)

Jotun A/S



www.epd-norge.no





General information

Product:

Jotafloor Non Slip Aggregate, Jotun U.A.E. Ltd. (L.L.C.)

Program operator:

The Norwegian EPD Foundation Pb. 5250 Majorstuen, 0303 Oslo Phone: +47 23 08 80 00 e-mail: post@epd-norge.no

Declaration number:

NEPD-3773-2711-EN

ECO Platform reference number:

This declaration is based on Product Category Rules:

CEN Standard EN 15804:2012+A1:2013 serves as core PCR. IBU PCR Part B for coatings with organic binders

Statement of liability:

The owner of the declaration shall be liable for the underlying information and evidence. EPD Norway shall not be liable with respect to manufacturer information, life cycle assessment data and evidences.

Declared unit:

1 kg Jotafloor Non Slip Aggregate, Jotun U.A.E. Ltd. (L.L.C.)

Declared unit with option:

A1,A2,A3

Functional unit:

Verification:

Independent verification of data, other environmental information and the declaration according to ISO 14025:2010, § 8.1.3 and § 8.1.4

External

Third party verifier:

Sian

Senior Research Scientist, Anne Rønning

and Konnig

(Independent verifier approved by EPD Norway)

Owner of the declaration:

Jotun A/S

Contact person: Cleo Alves Otterbech

Phone: +47 33 45 70 00 e-mail: cleo.otterbech@jotun.no

Manufacturer:

Jotun U.A.E. Ltd. (L.L.C.)

Place of production:

Jotun U.A.E. Ltd. (L.L.C.)

Near Old National Taxi depot. Street 17A, Al Quoz Industrial Area 2 Dubai

United Arab Emirates

Management system:

ISO 9001:2008 Certificate nr: 0044915-00, ISO 14001:2004 Certificate nr 0044914-00, ISO 45001: 2018 Certificate nr: 0098139

Organisation no:

923 248 579

Issue date: 30 09 2022

Valid to: 30.09.2027

Year of study:

2022

Comparability:

EPD of construction products may not be comparable if they not comply with EN 15804 and seen in a building context.

Author of the Life Cycle Assessment:

The declaration is developed using EPD tool lca.tools ver EPD2020.11, developed by LCA.no AS

Collected/registered by:

Ragnhild Bjerkvik Alnes

Internal verification by:

Cleo Alves Otterbech

Approved:

Approval:

Sign

(Managing Director EPD-Norway)



Product

Product description:

Jotafloor Non Slip Aggregate is graded silica aggregates, designed to be spread into a desired non-skid system. It is available in coarse, medium and fine particle sizes.

The declared product is suitable as anti-skid material in a wide range of coating systems in atmospheric environments. It is suitable on any type of surface, depending on the specific coating system.

Jotafloor Non Slip Aggregate is recommended for warehouses, garages, dairies, factories, laboratories, aircraft hangars, food, beverage and plant rooms where non-slip properties are required. The spreading is to take place in the wet film during application.

Product specification

For information on Green Building Standard credits, see "Additional Information" on page 4.

The material composition of the declared mixed product is given below:

Materials	%
Graded silica aggregates	100

Technical data:

Density: 2.7 g/cm³ Solids by volume: 100 %

Particle Size: Fine: 0.0 - 0.3 mm Medium: 0.4 - 0.8 mm Coarse: 0.6 - 1.4 mm

This EPD covers the three product types with coarse, medium and fine particle sizes. The production process is similar for these three types of aggregates.

The product packaging consist of paperbased material. Secondary packaging, such as pallets and plastic wrapping, is included.

For safety, health and environmental conditions, see the Safety Data Sheet for the declared product on www.jotun.com.

For information on technical data, application and use of the product, see the Technical Data Sheet for the declared product on www.jotun.com.

Market:

Global. Transport to market is not included in this EPD.

Reference service life, product

The reference service life of the product is highly dependent on the conditions of use.

Estimated service life, object

The coated object is not declared.

LCA: Calculation rules

Declared unit:

1 kg Jotafloor Non Slip Aggregate, Jotun U.A.E. Ltd. (L.L.C.)

Cut-off criteria:

All major raw materials and essential energy is included. The production process for raw materials and energy flows with very small amounts (less than 0.1 % dry matter) are not included. In total, more than 99% of the material input is included. These cut-off criteria do not apply for non-energy related emissions (such as wastes, hazardous materials and substances).

Allocation:

The allocation is made in accordance with the provisions of EN 15804. Incoming energy, water and waste production in-house is primarily allocated equally among all products through mass allocation. Specific allocation was performed for certain waste flows according to information provided by the site manager. VOC emissions have been allocated entirely to the production of solvent based paints. Effects of primary production of recycled materials is allocated to the main product in which the material was used. The recycling process and transportation of the material is allocated to this analysis.

Data quality:


The CEPE database is used as basis for the raw material composition. Specific data for the product composition and raw material amounts has been provided by the manufacturer and represents the production of the declared product. Production site data was collected in 2015. Representative data from ecoinvent v3.2 was used for other processes. The data quality for the material input in A1 is presented in tabular form.

Materials	Source	Data quality	Year
Additives	CEPE RM Database v3.0	Database	2016
Packaging	Østfoldforskning	Database	2017



System boundary:

The flowchart in the figure below illustrates the system boundaries for the analysis, in accordance with the modular principle on EN 15804. The analysis is a cradle-to-gate (A1-A3) study.

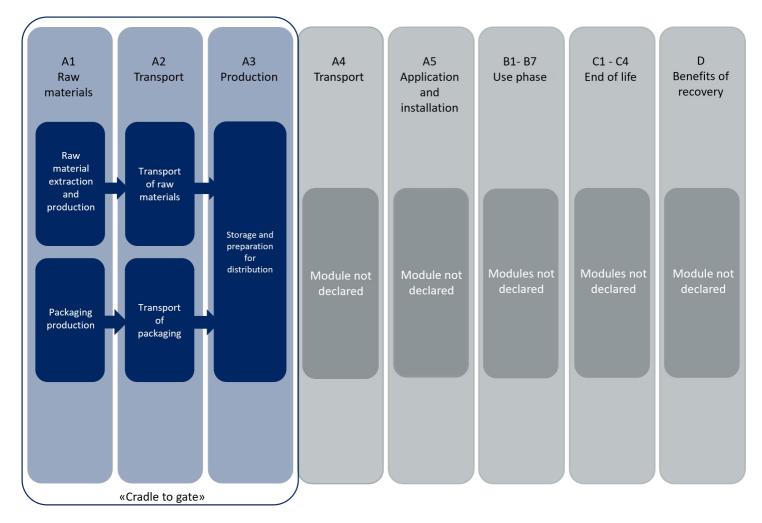

Additional information:

The declared product contributes to Green Building Standard credits by meeting the following specific requirements:

LEED ® v4.1 (2020)/LEED ® v4 (2013)

EQ credit, Low-emitting materials

- Inherently non-emitting sources. The product does not contain organic-based surface coatings, binders, or sealants and is an inherently non-emitting source of VOCs and is considered fully compliant without any VOC emissions testing.

MR credit: Building product disclosure and optimization

- Material Ingredients, Option 2: Material Ingredient Optimization, International Alternative Compliance Path REACH optimization: Fully inventoried chemical ingredients to 100 ppm and not containing substances on the REACH Authorization list Annex XIV, the Restriction list Annex XVII and the SVHC candidate list.
- Environmental Product Declarations: Product-specific Type III EPD (ISO 14025;21930, EN 15804) for Jotun U.A.E. Ltd. (L.L.C.).

BREEAM® International (2021)/BREEAM® International (2016)

- Mat 01: Product-specific Type III EPD (ISO 14025;21930, EN 15804) for Jotun U.A.E. Ltd. (L.L.C.).

Additional certificates and approvals may be available on request.



LCA: Scenarios and additional technical information

The following information describe the scenarios in the different modules of the EPD.

This is a cradle to gate (A1-A3) EPD with no declared modules after the factory gate. Transport from place of production to user (A4) has to be calculated by the user.

Туре	Capacity utilisation (incl. return) %	Type of v	rehicle	Distance km	Fuel/Energy consumption	Unit		Value (I/t)
Truck						I/tkm		
Railway						I/tkm		
Boat						I/tkm		
Other Transr rtation						I/tkm		
Assembly			Use (E	31)				
	Unit	Value					Unit	Value
Auxiliary	kg							
Water consumption	m ³		1					
Electricity consumption	kWh		1					
Other energy carriers	MJ		1					
Material loss	dria		1					
Output materials from waste treatment	.05		1					
Dust in the air	di		1					
VOC emissions	, c	ra						
Maintenance (B2)/Repair (B3)	kg m³ kWh MJ Arios Afte Unit kg kg m³ kWh MJ kg kg	77.	'A ~	ment (B4)/Ref	urbishment (B5)			
	Unit	Value	ਾਹ	a			Unit	Valu
Maintenance cycle*			HE,	ale.				
Auxiliary	kg		Electr	ici. 704			kWh	
Other resources	kg		Repla	cement	in			
Water consumption	m ³		* Desc	cribed above is	"/C/,			
Electricity consumption	kWh		_		.400			
Other energy carriers	MJ		1		.60	y		
Material loss	kg		_			•		
			1					
VOC emissions	kg							
			-	f Life (C1, C3, C4				
	mption (B7)	Value	-				Unix	Value
	mption (B7)		End o		1)		Uni. kg	Valu
Operational energy (B6) and water consu	mption (B7)		End o	f Life (C1, C3, C4 dous waste dispo	sed			Value
Operational energy (B6) and water consu Water consumption	mption (B7) Unit m³		End o	dous waste dispo	sed		kg	Value
Operational energy (B6) and water consu. Water consumption Electricity consumption Other energy carriers	mption (B7) Unit m³ kWh		End o	dous waste dispo	sed		kg kg	Value
Operational energy (B6) and water consu. Water consumption Electricity consumption Other energy carriers	mption (B7) Unit m³ kWh MJ		End o	dous waste dispo	sed		kg kg kg	Value
Operational energy (B6) and water consu Water consumption Electricity consumption	mption (B7) Unit m³ kWh MJ		End o	dous waste dispo ted as mixed cor cling y recovery	sed		kg kg kg kg	Valu
Operational energy (B6) and water consu. Water consumption Electricity consumption Other energy carriers	mption (B7) Unit m³ kWh MJ		End o	dous waste dispo ted as mixed cor cling y recovery	sed		kg kg kg kg kg	Value

I/tkm

I/tkm

I/tkm

I/tkm

Truck

Boat

Railway

Other Transportation

return) %



LCA: Results

System boundaries (X=included, MND=module not declared, MNR=module not relevant)

Pro	oduct sta	nge	instal	uction lation ige			l	User stag	e				End of I	life stage	•	Beyond the system bondaries
Raw materials	Transport	Manufacturing	Transport	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational wafer use	De- construction demolition	Transport	W aste processing	Disposal	Reuse-Recovery- Recycling- potential
A1	A2	A3	A4	A5	B1	B2	В3	B4	B5	В6	В7	C1	C2	C3	C4	. D
Х	Χ	Х	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND	. MND

Environmental impact

Parameter	Unit	A1-A3
GWP	kg CO ₂ -eq	3,57E-01
ODP	kg CFC11 -eq	5,72E-09
POCP	kg C ₂ H ₄ -eq	5,10E-05
AP	kg SO ₂ -eq	8,48E-04
EP	kg PO ₄ ³⁻ -eq	1,87E-04
ADPM	kg Sb -eq	1,72E-07
ADPE	MJ	4,15E+00

GWP Global warming potential; ODP Depletion potential of the stratospheric ozone layer, POCP Formation potential of tropospheric photochemical oxidants; AP Acidification potential of land and water; EP Eutrophication potential; ADPM Abiotic depletion potential for non fossil resources; ADPE Abiotic depletion potential for fossil resources

"Reading example: 9,0 E-03 = 9,0*10-3 = 0,009"

*INA Indicator Not Assessed



Resource use

Parameter	Unit	A1-A3
RPEE	MJ	1,61E+00
RPEM	MJ	5,02E-01
TPE	MJ	2,11E+00
NRPE	MJ	5,01E+00
NRPM	MJ	0,00E+00
TRPE	MJ	5,01E+00
SM	kg	0,00E+00
RSF	MJ	0,00E+00
NRSF	MJ	0,00E+00
w	m ³	5,19E-01

RPEE Renewable primary energy resources used as energy carrier; RPEM Renewable primary energy resources used as raw materials; TPE Total use of renewable primary energy resources; NRPE Non renewable primary energy resources used as materials; TRPE Total use of non renewable primary energy resources; SM Use of secondary materials; RSF Use of renewable secondary fuels; NRSF Use of non renewable secondary fuels; W Use of net fresh water

"Reading example: 9,0 E-03 = 9,0*10-3 = 0,009"

*INA Indicator Not Assessed

End of life - Waste

Parameter	Unit	A1-A3
HW	kg	1,20E-05
NHW	kg	4,23E-02
RW	kg	INA*

HW Hazardous waste disposed; NHW Non hazardous waste disposed; RW Radioactive waste disposed

"Reading example: 9,0 E-03 = 9,0*10-3 = 0,009"

*INA Indicator Not Assessed

End of life - Output flow

Parameter	Unit	A1-A3
CR	kg	0,00E+00
MR	kg	0,00E+00
MER	kg	0,00E+00
EEE	MJ	INA*
ETE	MJ	INA*

CR Components for reuse; MR Materials for recycling; MER Materials for energy recovery; EEE Exported electric energy; ETE Exported thermal energy

"Reading example: 9,0 E-03 = 9,0*10-3 = 0,009"

*INA Indicator Not Assessed



Additional requirements

Greenhouse gas emissions from the use of electricity in the manufacturing phase

National production mix from import, low voltage (production of transmission lines, in addition to direct emissions and losses in grid) of applied electricity for the manufacturing process (A3).

Electricity mix	Data source	Amount	Unit
Electricity, United Arab Emirates (kWh)	ecoinvent 3.3 Alloc Rec	1113,82	g CO2-ekv/kWh

Dangerous substances

The product contains no substances given by the REACH Candidate list.

Indoor environment

The declared product does not contain organic-based surface coatings, binders or sealants, and is an inherently non-emitting source of VOCs.

Bibliography

ISO 14025:2010 Environmental labels and declarations - Type III environmental declarations - Principles and procedures.

ISO 14044:2006 Environmental management - Life cycle assessment - Requirements and guidelines.

EN 15804:2012+A1:2013 Environmental product declarations - Core rules for the product category of construction products.

ISO 21930:2017 Sustainability in buildings and civil engineering works - Core rules for environmental product declarations of construction products.

IBU PCR Part B: Requirements on the EPD for Coatings with organic binders. v1.4, September 2016.

Vold et al (2017). EPD and LCA tool for Jotun - Technical description and background information, OR 01.17, Ostfold Research, Fredrikstad 2017.

CEPE v3.0 Raw materials LCI database for the European coatings and printing ink industries, May 2016.

ecoinvent v3.2 Alloc Rec, Swiss Centre of Life Cycle Inventories.

BREEAM International (2021): BREEAM International New Construction Technical Manual - SD250. Ver. 6.0 (2021).

BREEAM International (2016): BREEAM International New Construction Technical Manual - SD233. Ver. 2.0 (2017).

LEED® v4.1 (2020): LEED® v4.1 for Building design and construction, U.S. Green Building Council®.

LEED® v4 (2013): LEED® v4 for Building design and construction, U.S. Green Building Council®.

REACH (2006): Regulation (EC) No 1907/2006 of the European Parliament and of the Council of 18 December 2006. REACH Authorization list – Annex XIV, the Restriction list – Annex XVII and the SVHC candidate list.

© epd-norway Global Program Operator	Program operator and publisher The Norwegian EPD Foundation Post Box 5250 Majorstuen, 0303 Oslo,Norway	Phone: e-mail: web:	+47 23 08 80 00 post@epd-norge.no www.epd-norge.no
JOTUN	Owner of the declaration Jotun A/S Hystadveien 167 3209 Sandefjord	Phone: e-mail: web:	+47 33 45 70 00 cleo.otterbech@jotun.no www.jotun.no
Ostfoldforskning	Author of the Life Cycle Assessment Østfoldforskning AS Stadion 4 1671 Kråkerøy	Phone: e-mail: web:	+47 69 35 11 00 post@ostfoldforskning.no www.ostfoldforskning.no