

ENVIRONMENTAL PRODUCT DECLARATION

in accordance with ISO 14025, ISO 21930 and EN 15804

Owner of the declaration:

Program operator:

Publisher:

Declaration number:

Registration number:

ECO Platform reference number:

Issue date:

Valid to:

Flokk AS

The Norwegian EPD Foundation

The Norwegian EPD Foundation

NEPD-3815-2771-EN

NEPD-3815-2771-EN

_

13.10.2022

13.10.2027

OFFECCT SOUNDSTICKS®

Flokk AS

www.epd-norge.no











General information

Product:

OFFECCT SOUNDSTICKS®

Owner of the declaration:

Flokk AS

Contact person: Atle Thiis-Messel Phone: 0047 98 25 68 30 e-mail: atle.messel@flokk.com

Program operator:

The Norwegian EPD Foundation Pb. 5250 Majorstuen, 0303 Oslo Phone: +47 23 08 80 00 e-mail: post@epd-norge.no

ECO Platform reference number:

Manufacturer:

Flokk AS Drammensveien 145, 0277 Oslo

Norway

Declaration number:

NEPD-3815-2771-EN

Place of production:

Flokk - Turek

ul. Górnicza 8 62-700 Turek

Poland

Management system:

ISO 14001, ISO 9001, ISO 50001(Norway, Sweden)

This declaration is based on Product Category Rules:

CEN Standard EN 15804:2012+A1:2013 serves as core PCR NPCR 026:2018 Part B for furniture

Organisation no:

No 928 902 749

Statement of liability:

The owner of the declaration shall be liable for the underlying information and evidence. EPD Norway shall not be liable with respect to manufacturer information, life cycle assessment data and evidences.

Issue date: 13.10.2022

Valid to: 13.10.2027

Declared unit:

1 Pcs OFFECCT SOUNDSTICKS®

2022

Declared unit with option:

A1,A2,A3,A4

Comparability:

Year of study:

 $\ensuremath{\mathsf{EPDs}}$ from programmes other than the Norwegian $\ensuremath{\mathsf{EPD}}$ Foundation may not be comparable

Functional unit:

Soundsticks 1 pc (Including packaging)

Development and verification of EPD:

The declaration has been developed and verified using EPD tool lca.tools ver EPD2020.11, developed by LCA.no AS. The EPD tool is integrated into the company's environmental management system, and has been approved by EPD-Norway

General information on verification of EPD from EPD tools:

Independent verification of data, other environmental information and the declaration according to ISO 14025:2010, § 8.1.3 and § 8.1.4. Individual third party verification of each EPD is not required when the EPD tool is i) integrated into the company's environmental management system, ii) the procedures for use of the EPD tool are approved by EPDNorway, and iii) the process is reviewed annualy. See Appendix G of EPD-Norway's General Programme Instructions for further information on EPD tools.

Developer of EPD:

Damian Bakowski

Reviewer of company-specific input data and EPD:

Arleta Derdziak

Verification of EPD tool:

Independent third party verification of the EPD tool, background data and test-EPD in accordance with EPDNorway's procedures and guidelines for verification and approval of EPD tools.

Approved:

Sign

Erik Svanes, Norsus AS

(no signature required)

Håkon Hauan, CEO EPD-Norge

Key environmental indicators	Unit	Cradle to gate A1 - A3
Global warming	kg CO2 eqv	6,38
Total energy use	MJ	89,11
Amount of recycled materials	%	56,19



Product

Market:

Wordwide

Product description:

Making a commercial product with left over materials, is easier said than done.

But after deep discussions and elaborate workshops with designer Andrea Ruggiero, a design and a method were developed that not only ensured a sustainable product, but also a product that could add something new and relevant to the acoustic segment.

Soundsticks consists of upcycled material left over from Offecct's furniture production, moulded into the shape of a tube that is held together in the ends by recycled aluminium caps.

Soundsticks offer a novel way to divide space while reducing ambient noise in public spaces or open plan workspaces. Available in linear, radial, and clustered configurations, Soundsticks are a modular ceilingmounted solution that can be hung at any height to complement seating areas or tables of variable heights. Collaborative meeting spaces, waiting areas, or private work-study spots are just some of the spaces that can easily be created with Soundsticks.

Product specification

Sound absorbing core of recycled molded left over fabric and PET bottles. Upholsterd in blue, grey, green alt. red scale of mixed excess fabric. Supplied in a pack of 8 pcs Soundsticks®.

Technical data:

https://www.offecct.com/product/soundsticks/

Reference service life, product

5 years

Reference service life, building

Materials	kg %		Recycled share in material (kg)	Recycled share in material (%)	
Kraft paper unbleached	0,00	0,12	0,00	0,00	
Metal - Aluminium	0,08	7,99	0,00	0,00	
Metal - Steel	0,04	3,63	0,00	4,00	
Metal - Brass	0,00	0,21	0,00	0,00	
Textile - Nylon (PA)	0,01	1,51	0,00	0,00	
Textile - Polyester (PE)	0,19	19,26	0,18	98,22	
Packaging - Cardboard	0,13	13,63	0,10	76,30	
Packaging - Plastic	0,00	0,13	0,00	0,00	
Plastic - Nylon (PA)	0,00	0,00	0,00	0,00	
Packaging - Paper	0,00	0,06	0,00	0,00	
Textile - Felt	0,51	52,74	0,25	50,00	
Total:	0,96		0,54		

LCA: Calculation rules

Declared unit:

1 Pcs OFFECCT SOUNDSTICKS®

Cut-off criteria:

All major raw materials and all the essential energy is included. The production processes for raw materials and energy flows with very small amounts (less than 1%) are not included. These cut-off criteria do not apply for hazardous materials and substances.

Allocation:


The allocation is made in accordance with the provisions of EN 15804. Effects of primary production of recycled materials is allocated to the main product in which the material was used. The recycling process and transportation of the material is allocated to this analysis.

Data quality:

Specific data for the product composition are provided by the manufacturer. They represent the production of the declared product and were collected for EPD development in the year of study. Background data is based on registered EPDs according to EN 15804, Ostfold Research databases, ecoinvent and other LCA databases. The data quality of the raw materials in A1 is presented in the table below.



System boundary:

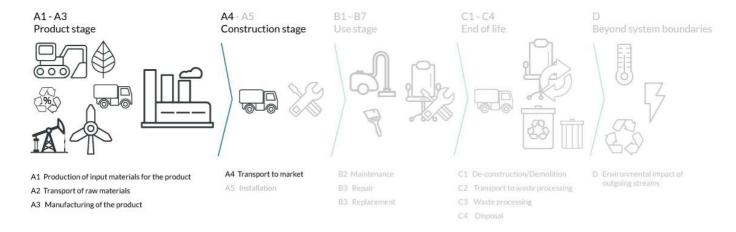

Additional technical information:



LCA: Scenarios and additional technical information

The following information describe the scenarios in the different modules of the EPD.

Transport from production place to user (A4)

Туре	Capacity utilisation (incl. return) %	Type of vehicle	Distance km	Fuel/Energy consumption	Unit	Value (I/t)
Truck	38,8 %	Truck, 16-32 tonnes, EURO 5	1000	0,044606	l/tkm	44,61
Railway					l/tkm	
Boat					l/tkm	
Other Transportation					l/tkm	

	nbly	

	Unit	Value
Auxiliary	kg	
Water consumption	m ³	
Electricity consumption	kWh	
Other energy carriers	MJ	
Material loss	kg	
Output materials fr ste treatment	kg	
Dust in the air	kg	
VOC emissions	kg	

Maintenance (B2)/Repair (B3)

Unit	Value
OCO.	
char.	
4//0)_
m ³	S. S.F.
kWh	116
MJ	
kg	
kg	
	Scenario m³ kWh MJ kg

Operational energy (B6) and water consumption (B7)

	Unit	Value
Water consumption	m ³	
Electricity consumption	kWh	
Other energy carriers	MJ	
Power output of equipment	KW	

Use (B1)

J	•	Unit	Value
1			
1			

Replacement (B4)/Refurbishment (B5)

	Unit	Value
Replacement cycle*		
Electricity consumption	kWh	
Replacement of worn parts		

* Described above if relevant

	A.D		
378	Described above if relevant		
.16	r .		
-	'A1		
	1.4		
	74		
	dro		
	- 1 W - 2 D		
	End of Life (C1, C 10)		
alue	· ///	Unit	
	End of Life (C1, C) Hazardous waste disposed Collected as mixed construction was Reuse	kg	Т
	Collected as mixed construction was	kg	Т
	Reuse	kg	Т
		_	-

	kg	
ď	kg	
•	kg	

Value

Transport to waste processing (C2)

Туре	Capacity utilisation (incl. return) %	Type of vehicle	Distance km	Fuel/Energy consumption	Unit	Value (I/t)
Truck					I/tkm	
Railway					I/tkm	
Boat					I/tkm	
Other Transportation					I/tkm	

Reuse Recycling Energy recovery To landfill



LCA: Results

The LCA results are presented below for the declared unit defined on page 2 of the EPD document.

System boundaries (X=included, MND=module not declared, MNR=module not relevant)

Pro	Product stage Construction User stage stage				End of life stage				Beyond the system bondaries							
Raw materials	Transport	Manufacturing	Transport	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De- construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery- Recycling- potential
A1	A2	A3	A4	A5	B1	B2	В3	B4	B5	В6	В7	C1	C2	C3	C4	. D
Х	Х	Х	Х	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND	. MND

Environmental impact

Parameter	Unit	A1	A2	A3	A4
GWP	kg CO ₂ -eq	5,54E+00	7,35E-02	7,64E-01	1,55E-01
ODP	kg CFC11 -eq	2,65E-07	1,38E-08	1,97E-08	2,87E-08
POCP	kg C ₂ H ₄ -eq	1,38E-03	1,19E-05	1,74E-04	2,53E-05
AP	kg SO ₂ -eq	2,51E-02	2,74E-04	4,60E-03	4,96E-04
EP	kg PO ₄ ³⁻ -eq	3,22E-03	4,89E-05	5,58E-04	8,23E-05
ADPM	kg Sb -eq	1,74E-04	1,58E-07	4,23E-08	4,74E-07
ADPE	MJ	6,50E+01	1,12E+00	7,79E+00	2,34E+00

GWP Global warming potential; ODP Depletion potential of the stratospheric ozone layer; POCP Formation potential of tropospheric photochemical oxidants; AP Acidification potential of land and water, EP Eutrophication potential; ADPM Abiotic depletion potential for non fossil resources; ADPE Abiotic depletion potential for fossil resources

Reading example: $9.0 \text{ E}-03 = 9.0*10-3 = 0.009}$ *INA Indicator Not Assessed



Resource use

Parameter	Unit	A1	A2	A3	A4
RPEE	MJ	7,39E+00	2,02E-02	9,14E-01	3,41E-02
RPEM	MJ	7,67E-01	0,00E+00	0,00E+00	0,00E+00
TPE	MJ	8,16E+00	2,02E-02	9,14E-01	3,41E-02
NRPE	MJ	7,13E+01	1,15E+00	8,23E+00	2,40E+00
NRPM	MJ	5,87E+00	0,00E+00	0,00E+00	0,00E+00
TRPE	MJ	7,72E+01	1,15E+00	8,23E+00	2,40E+00
SM	kg	6,51E-01	0,00E+00	0,00E+00	0,00E+00
RSF	MJ	2,79E-02	0,00E+00	0,00E+00	0,00E+00
NRSF	MJ	2,97E-02	0,00E+00	0,00E+00	0,00E+00
W	m ³	5,18E-02	2,65E-04	4,10E-03	4,49E-04

RPEE Renewable primary energy resources used as energy carrier; RPEM Renewable primary energy resources used as raw materials; TPE Total use of renewable primary energy resources; NRPE Non renewable primary energy resources used as energy carrier; NRPM Non renewable primary energy resources used as materials; TRPE Total use of non renewable primary energy resources; SM Use of secondary materials; RSF Use of renewable secondary fuels; NRSF Use of non renewable secondary fuels; W Use of net fresh water

Reading example: 9,0 E-03 = 9,0*10-3 = 0,009

*INA Indicator Not Assessed

End of life - Waste

Parameter	Unit	A1	A2	A3	A4
HW	kg	1,15E-02	6,53E-07	3,93E-03	1,40E-06
NHW	kg	3,06E+00	8,97E-02	2,86E-01	1,26E-01
RW	kg	INA*	INA*	INA*	INA*

HW Hazardous waste disposed; NHW Non hazardous waste disposed; RW Radioactive waste disposed

Reading example: 9.0 E-03 = 9.0*10-3 = 0.009

*INA Indicator Not Assessed

End of life - Output flow

· · · · · · · · · · · · · · · · · · ·					
Parameter	Unit	A1	A2	A3	A4
CR	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00
MR	kg	2,87E-04	0,00E+00	9,59E-02	0,00E+00
MER	kg	1,00E-02	0,00E+00	5,87E-04	0,00E+00
EEE	MJ	INA*	INA*	INA*	INA*
ETE	MJ	INA*	INA*	INA*	INA*

CR Components for reuse; MR Materials for recycling; MER Materials for energy recovery; EEE Exported electric energy; ETE Exported thermal energy

Reading example: 9.0 E-03 = 9.0*10-3 = 0.009

*INA Indicator Not Assessed



Additional Norwegian requirements

Greenhouse gas emissions from the use of electricity in the manufacturing phase

National production mix from import, low voltage (production of transmission lines, in addition to direct emissions and losses in grid) of applied electricity for the manufacturing process (A3).

Electricity mix	Data source	Amount	Unit
Energy, electricity, Poland: 1 kWh	ecoinvent 3.6	1099,70	g CO2-ekv/kWh

Dangerous substances

The product contains substances given by the REACH Candidate list and the Norwegian priority list that are less than 0,1 % by weight.

Name	CASNo	Amount
Cadmium	7440-43-9	<0,1%
Nickel	7440-02-0	<0,1%
Lead	7439-92-1	<0,1%

Indoor environment

Additional environmental information

Key environmental indicators for variants for this EPD: Cradle to Gate analyse from A1 to A3

Variant number	Global warming (kg CO2)	Total energy use (MJ)	Share of recycled material in product(%)
SOUNDSTICKS® RAILS STRAIGHT 1500MM (Including packaging)	13,84	149,80	34,04
SOUNDSTICKS® RAILS CURVED R1846 (Including packaging)	34,78	379,40	46,49
SOUNDSTICKS® CLUSTER Ø800 (Including packaging)	8,20	203,79	22,50

Bibliography

ISO 14025:2010 Environmental labels and declarations - Type III environmental declarations - Principles and procedures.

ISO 14044:2006 Environmental management - Life cycle assessment - Requirements and guidelines.

EN~15804:2012+A1:2013~Environmental~product~declaration~-~Core~rules~for~the~product~category~of~construction~products.

ISO 21930:2017 Sustainability in buildings and civil engineering works - Core rules for environmental product declarations of construction products.

 $ecoinvent\ v3,\ Allocation,\ cut-off\ by\ classification,\ Swiss\ Centre\ of\ Life\ Cycle\ Inventories.$

 $Iversen\ et\ al.,\ (2018)\ eEPD\ v3.0\ -\ Background\ information\ for\ EPD\ generator\ system.\ LCA. no\ report\ number\ 04.18$

Vold et al., (2019) EPD generator for Norsk Industri, Background information for industry application and LCA data, LCA.no report number 06.19.

NPCR Part A: Construction products and services. Ver. 1.0. April 2017, EPD-Norge.

NPCR 026 Part B for Furniture. Ver. 2.0 October 2018, EPD-Norge.

© epd-norway Global Program Operator	Program operator and publisher The Norwegian EPD Foundation Post Box 5250 Majorstuen, 0303 Oslo,Norway	Phone: e-mail: web:	+47 23 08 80 00 post@epd-norge.no www.epd-norge.no
lilol:l:	Owner of the declaration Flokk AS Drammensveien 145, 0277 Oslo	Phone: e-mail: web:	0047 98 25 68 30 atle.messel@flokk.com https://www.flokk.com
LCA)	Author of the Life Cycle Assessment	Phone:	+47 916 50 916
	LCA.no AS	e-mail:	post@lca.no
	Dokka 6B 1671 Kråkerøy	web:	www.lca.no
LCA,	Developer of EPD generator	Phone:	+47 916 50 916
	LCA.no AS	e-mail:	post@lca.no
	Dokka 1C 1671 Kråkerøy	web:	www.lca.no