

Environmental product declaration in accordance with ISO 14025, ISO 21930 and EN 15804

Owner of the declaration:	Helland Møbler AS
Program operator:	The Norwegian EPD Foundation
Publisher:	The Norwegian EPD Foundation
Declaration number:	NEPD-4206-3433-EN
Registration number:	NEPD-4206-3433-EN
ECO Platform reference number:	-
Issue date:	30.12.2022
Valid to:	30.12.2027

Pan Dining table 180x90, rectangular, whole top

Helland Møbler AS



www.epd-norge.no





General information

Product:

Pan Dining table 180x90, rectangular, whole top

Program operator:

The Norwegian EPD Foundation Pb. 5250 Majorstuen, 0303 Oslo Phone: +47 23 08 80 00 e-mail: post@epd-norge.no

Declaration number:

NEPD-4206-3433-EN

ECO Platform reference number:

This declaration is based on Product Category Rules:

CEN Standard EN 15804:2012+A1:2013 serves as core PCR NPCR 026:2018 Part B for furniture

Statement of liability:

The owner of the declaration shall be liable for the underlying information and evidence. EPD Norway shall not be liable with respect to manufacturer information, life cycle assessment data and evidences.

Declared unit:

1 Pcs Pan Dining table 180x90, rectangular, whole top

Declared unit with option:

A1,A2,A3,A4

Functional unit:

Production of the table provided and maintained for a period of 15 years.

General information on verification of EPD from EPD tools:

Independent verification of data, other environmental information and the declaration according to ISO 14025:2010, § 8.1.3 and § 8.1.4. Individual third party verification of each EPD is not required when the EPD tool is i) integrated into the company's environmental management system, ii) the procedures for use of the EPD tool are approved by EPDNorway, and iii) the proccess is reviewed annualy. See Appendix G of EPD-Norway's General Programme Instructions for further information on EPD tools.

Verification of EPD tool:

Independent third party verification of the EPD tool, background data and test-EPD in accordance with EPDNorway's procedures and guidelines for verification and approval of EPD tools.

Erik Svanes, Norsus AS (no signature required)

Owner of the declaration:

Helland Møbler AS Contact person: Joakim Helland Phone: +47 958 09 013 e-mail: joakim.helland@helland.no

Manufacturer:

Helland Møbler AS Postboks 10 6259 Stordal Norway

Place of production:

Helland Baltic ÖU Hapvali, Nõmme küla, Haapsalu linn EE-90439 Läänemaa Estonia

Management system:

ISO 14001:2015, sertifikat nr 901085

Organisation no:

943 511 128

Issue date: 30.12.2022

Valid to: 30.12.2027

Year of study:

2021

Comparability:

. ,

EPDs from programmes other than the Norwegian EPD Foundation may not be comparable

Development and verification of EPD:

The declaration has been developed and verified using EPD tool lca.tools ver EPD2020.11, developed by LCA.no AS. The EPD tool is integrated into the company's environmental management system, and has been approved by EPD-Norway

Developer of EPD:

Oddrun Aunet Innselset

Reviewer of company-specific input data and EPD:

Pawel Sosinski

Approved:

Sign

Håkon Hauan, CEO EPD-Norge

Key environmental indicators	Unit	Cradle to gate A1 - A3
Global warming	kg CO2 eqv	40,43
Total energy use	MJ	1128,56
Amount of recycled materials	%	5,55



Product

Market:

Europa and USA

Product description:

Pan is a very popular model, with its stylish design and solid construction. The modern table legs in solid wood give the table a light and airy feel in the room. Pan is a very versatile table that fits most dining chairs and interiors. The dining table comes in both a square and round version. Key environmental indicators for variants on page 8.

Product specification

-Rectangular table top

-Chipboard core, table top

-Wooden base

-Chemical disinfectant ok (acid-cured varnish)

Technical data:

Width: 90cm Height: 75cm Depth: 180cm

Reference service life, product

15 years

Reference service life, building

Materials	kg	%	Recycled share in material (kg)	Recycled share in material (%)	
Metal - Steel	0,17	0,51	0,03	20,00	
Plastic - Acrylonitrile butadiene styrene (ABS)	0,38	1,12	0,00	0,00	
Wood - Solid beech/birch	6,24	18,35	0,00	0,00	
Wood - Chipboard	23,26	68,41	0,00	0,00	
Glue for wood	0,20	0,59	0,00	0,00	
High pressure laminate - HPL thin	3,24	9,53	0,01	0,39	
Paint, solvent-based	0,50	1,47	0,00	0,00	
Plastic - Nylon (PA)	0,01	0,02	0,00	0,00	
Total:	34,00		0,05		
Packaging	kg		Recycled share in material (kg)	Recycled share in material (%)	
Packaging - Cardboard	2,60		1,99	76,30	
Total including packaging	36,6		2,04		

LCA: Calculation rules

Declared unit:

1 Pcs Pan Dining table 180x90, rectangular, whole top

Cut-off criteria:

All major raw materials and all the essential energy is included. The production processes for raw materials and energy flows with very small amounts (less than 1%) are not included. These cut-off criteria do not apply for hazardous materials and substances.

Allocation:

The allocation is made in accordance with the provisions of EN 15804. Effects of primary production of recycled materials is allocated to the main product in which the material was used. The recycling process and transportation of the material is allocated to this analysis.


Data quality:

Specific data for the product composition are provided by the manufacturer. They represent the production of the declared product and were collected for EPD development in the year of study. Background data is based on registered EPDs according to EN 15804, Ostfold Research databases, ecoinvent and other LCA databases. The data quality of the raw materials in A1 is presented in the table below.

Materials	Source	Data quality	Year
Plastic - Acrylonitrile butadiene styrene (ABS)	ecoinvent 3.4	Database	2015
Metal - Steel	ecoinvent 3.3	Database	2016
Glue for wood	ecoinvent 3.4	Database	2017
Packaging - Cardboard	ecoinvent 3.4	Database	2017
Paint, solvent-based	ecoinvent 3.4	Database	2017
Wood - Chipboard	ecoinvent 3.4	Database	2017
Wood - Solid beech/birch	ecoinvent 3.4	Database	2017
High pressure laminate - HPL thin	EPD-ICL-20170155-CBE1-EN	epd, ibu	2017
Plastic - Nylon (PA)	ecoinvent 3.6	Database	2019



System boundary:

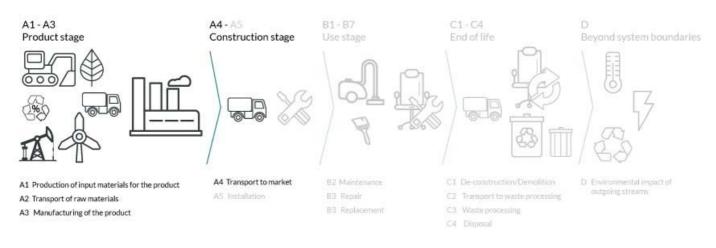

Additional technical information:

Transportation to an average customer in Copenhagen is 1000 km (A4: average European lorry > 32 tonnes) The use stage (B1) is represented by a scenario and includes vacuum cleaning of textile once a month. The PCR does not provide detailed guidelines for what should be included in the use stage. In the end of life stage, the transport distance for waste to waste processing is 72 km (C1). The reuse, recovery and recycling stage is beyond the system boundaries (D). It is assumed that the solution is dismantled and the materials recycled or combusted according to general Norwegian treatment of industrial waste (see the table below). This calculation includes only CO2 emissions (GWP) in the C-modules. The transport distance to reuse, recovery or recycling varies for each material, but the average distance is 373 km. The vehicles used and associated data are described in detail in [5].



kg

LCA: Scenarios and additional technical information

The following information describe the scenarios in the different modules of the EPD.

Transportation to an average customer in Copenhagen is 1000 km (A4: average European lorry > 32 tonnes) The use stage (B1) is represented by a scenario and includes vacuum cleaning of textile once a month. The PCR does not provide detailed guidelines for what should be included in the use stage. In the end of life stage, the transport distance for waste to waste processing is 72 km (C1). The reuse, recovery and recycling stage is beyond the system boundaries (D). It is assumed that the solution is dismantled and the materials recycled or combusted according to general Norwegian treatment of industrial waste (see the table below). This calculation includes only CO2 emissions (GWP) in the C-modules. The transport distance to reuse, recovery or recycling varies for each material, but the average distance is 373 km. The vehicles used and associated data are described in detail in [5].

Transport from production place to user (A4)

Туре	Capacity utilisation (incl. return) %	Type of vehicle	Distance km	Fuel/Energy consumption	Unit	Value (l/t)
Truck	38,8 %	Truck, 16-32 tonnes, EURO 5	942	0,044606	l/tkm	42,02
Railway					l/tkm	
Boat					l/tkm	
Other Transportation					l/tkm	

Assembly (A5)			Use (B1)		
•)	Unit	Value	•	Unit	Valu
Auxiliary	kg				
Water consumption	m ³				
Electricity consumption	kWh		1		
Other energy carriers	MJ]		
Material loss	kg				
Output materials fr ste treatment	kg]		
Dust in the air	kg]		
VOC emissions	kg				

Maintenance (B2)/Repair (B3)

	Unit	Value	•	Unit	Value
Maintenance cycle*	N°CO		Replacement cycle*		
Auxiliary	Char.		Electricity consumption	kWh	
Other resources	4rio		Replacement of worn parts		
Water consumption	Scenario m ³ kWh	N. 94	Described above if relevant	6.6	
Electricity consumption	kWh				
Other energy carriers	MJ		47.		
Material loss	kg		AA are		
VOC emissions	kg		* 3 ~		

Replacement (B4)/Refurbishment (B5)

tional onergy (PE) and water consu n (P7)

operational energy (bb) and water consumption (57)		End of Life (CI, C OF.		
	Unit	Value		Unit	Value
Water consumption	m ³		Hazardous waste disposed	kg	
Electricity consumption	kWh		Collected as mixed construction we.	kg	
Other energy carriers	MJ		Reuse	kg	
Power output of equipment	KW		Recycling		
			Energy recovery		

To landfill

Transport to waste processing (C2)

Туре	Capacity utilisation (incl. return) %	Type of vehicle	Distance km	Fuel/Energy consumption	Unit	Value (l/t)
Truck					l/tkm	
Railway					l/tkm	
Boat					l/tkm	
Other Transportation					l/tkm	



LCA: Results

The LCA results are presented below for the declared unit defined on page 2 of the EPD document.

System boundaries (X=included, MND=module not declared, MNR=module not relevant)

P	roduct sta	age	instal	uction lation age			ι	Jser stag	e				End of	life stage	9	Beyond the system bondaries
Raw materials	Transport	Manufacturing	Transport	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De- construction demolition	Transport	W ast e processing	Disposal	Reuse-Recovery- Recycling- potential
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	. D
Х	Х	Х	Х	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND	. MND

Environmental impact

Parameter	Unit	A1	A2	A3	A4
GWP	kg CO ₂ -eq	2,91E+01	8,55E-01	1,05E+01	5,61E+00
ODP	kg CFC11 -eq	1,87E-06	1,58E-07	5,05E-07	1,03E-06
POCP	kg C ₂ H ₄ -eq	1,09E-02	1,39E-04	1,97E-03	9,14E-04
AP	kg SO ₂ -eq	1,16E-01	2,74E-03	4,86E-02	1,79E-02
EP	kg PO4 ³⁻ -eq	1,90E-02	4,60E-04	6,52E-03	2,97E-03
ADPM	kg Sb -eq	7,89E-05	2,63E-06	1,56E-05	1,71E-05
ADPE	MJ	4,39E+02	1,29E+01	1,12E+02	8,45E+01

GWP Global warming potential; ODP Depletion potential of the stratospheric ozone layer; POCP Formation potential of tropospheric photochemical oxidants; AP Acidification potential of land and water; EP Eutrophication potential; ADPM Abiotic depletion potential for non fossil resources; ADPE Abiotic depletion potential for fossil resources

Reading example: 9,0 E-03 = 9,0*10-3 = 0,009 *INA Indicator Not Assessed



Resource use

RPEE MJ 4,19E+02 1,88E-01 4,64E+01 1,23E+0 RPEM MJ 3,53E+02 0,00E+00 0,00E+00 0,00E+00 PE MJ 7,72E+02 1,88E-01 4,64E+01 1,23E+00 NRPE MJ 4,54E+02 1,32E+01 1,95E+02 8,65E+0 NRPM MJ 4,46E+01 0,00E+00 0,00E+00 0,00E+00 RPE MJ 4,46E+01 0,00E+00 0,00E+00 0,00E+00 NRPM MJ 4,46E+01 0,00E+00 0,00E+00 0,00E+00 RPE MJ 4,46E+01 0,00E+00 0,00E+00 0,00E+00 RPE MJ 4,99E+02 1,32E+01 1,95E+02 8,65E+0 SM kg 2,03E+00 0,00E+00 0,00E+00 0,00E+00 RSF MJ 6,45E-01 0,00E+00 0,00E+00 0,00E+00 NRSF MJ 5,01E-01 0,00E+00 0,00E+00 0,00E+00						
MJ 3,53E+02 0,00E+00 0	Parameter	Unit	A1	A2	A3	A4
PE MJ 7,72E+02 1,88E-01 4,64E+01 1,23E+0 JRPE MJ 4,54E+02 1,32E+01 1,95E+02 8,65E+0 JRPM MJ 4,46E+01 0,00E+00 0,00E+00 0,00E+00 0,00E+00 RPE MJ 4,499E+02 1,32E+01 1,95E+02 8,65E+0 SM kg 2,03E+00 0,00E+00 0,00E+00 0,00E+00 KSF MJ 6,45E-01 0,00E+00 0,00E+00 0,00E+00 MSF MJ 5,01E-01 0,00E+00 0,00E+00 0,00E+00	RPEE	MJ	4,19E+02	1,88E-01	4,64E+01	1,23E+00
NRPE MJ 4,54E+02 1,32E+01 1,95E+02 8,65E+0 NRPM MJ 4,46E+01 0,00E+00 0,00E+00 0,00E+00 0,00E+00 RPE MJ 4,99E+02 1,32E+01 1,95E+02 8,65E+0 SM kg 2,03E+00 0,00E+00 0,00E+00 0,00E+00 0,00E+00 RSF MJ 5,01E-01 0,00E+00 0,00E+00 0,00E+00 0,00E+00	RPEM	MJ	3,53E+02	0,00E+00	0,00E+00	0,00E+00
NRPM MJ 4,46E+01 0,00E+00 0,00E	TPE	MJ	7,72E+02	1,88E-01	4,64E+01	1,23E+00
RPE MJ 4,99E+02 1,32E+01 1,95E+02 8,65E+02 SM kg 2,03E+00 0,00E+00 0,00E+00 <td< td=""><td>NRPE</td><td>MJ</td><td>4,54E+02</td><td>1,32E+01</td><td>1,95E+02</td><td>8,65E+01</td></td<>	NRPE	MJ	4,54E+02	1,32E+01	1,95E+02	8,65E+01
kg 2,03E+00 0,00E+00 0	NRPM	MJ	4,46E+01	0,00E+00	0,00E+00	0,00E+00
MJ 6,45E-01 0,00E+00 0	TRPE	MJ	4,99E+02	1,32E+01	1,95E+02	8,65E+01
NRSF MJ 5,01E-01 0,00E+00 0,00E+00 0,00E+0	SM	kg	2,03E+00	0,00E+00	0,00E+00	0,00E+00
	RSF	MJ	6,45E-01	0,00E+00	0,00E+00	0,00E+00
V m ³ 3,28E-01 2,47E-03 9,28E-02 1,62E-0	NRSF	MJ	5,01E-01	0,00E+00	0,00E+00	0,00E+00
	W	m ³	3,28E-01	2,47E-03	9,28E-02	1,62E-02

RPEE Renewable primary energy resources used as energy carrier; RPEM Renewable primary energy resources used as raw materials; TPE Total use of renewable primary energy resources; NRPE Non renewable primary energy resources used as energy carrier; NRPM Non renewable primary energy resources used as materials; TRPE Total use of non renewable primary energy resources; SM Use of secondary materials; RSF Use of renewable secondary fuels; NRSF Use of non renewable secondary fuels; W Use of net fresh water

Reading example: 9,0 E-03 = 9,0*10-3 = 0,009 *INA Indicator Not Assessed

End of life - Waste

Parameter	Unit	A1	A2	A3	A4	
HW	kg	1,37E-03	7,73E-06	4,12E-02	5,05E-05	
NHW	kg	7,21E+00	6,92E-01	2,72E+00	4,55E+00	
RW	kg	INA*	INA*	INA*	INA*	
HW Hazardous waste disposed; NHW Non hazardous waste disposed; RW Radioactive waste disposed						
Reading example: 9,0 E-03 = 9,0*10-3 = 0,009 *INA Indicator Not Assessed						

End of life - Output flow

Parameter	Unit	A1	A2	A3	A4
CR	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00
MR	kg	0,00E+00	0,00E+00	5,71E-02	0,00E+00
MER	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00
EEE	MJ	INA*	INA*	INA*	INA*
ETE	MJ	INA*	INA*	INA*	INA*
CR Components for reuse; MR Materials for recycling; MER Materials for energy recovery; EEE Exported electric energy; ETE Exported thermal energy					

Reading example: 9,0 E-03 = 9,0*10-3 = 0,009

*INA Indicator Not Assessed



Additional Norwegian requirements

Greenhouse gas emissions from the use of electricity in the manufacturing phase

National production mix from import, low voltage (production of transmission lines, in addition to direct emissions and losses in grid) of applied electricity for the manufacturing process (A3).

Electricity mix	Data source	Amount	Unit
Energy, electricity, European average: 1 kWh	ecoinvent 3.4	594,20	g CO2-ekv/kWh

Dangerous substances

The product contains no substances given by the REACH Candidate list or the Norwegian priority list.

Indoor environment

Our Furniture not contain any substances that affects indoor climate.

Additional environmental information

Key environmental indicators for variants for this EPD: Cradle to Gate analyse from A1 to A3

Variant number	Global warming (kg CO2)	Total energy use (MJ)	Share of recycled material in product(%)
Pan Dining table 180x100, rounded corners, whole top	42,40	1 186,96	5,28
Pan Dining table 180x80, rectangular, whole top	38,04	1 047,53	6,04
Pan Dining table 160x80, rectangular, whole top	36,19	989,47	6,42
Pan Dining table 140x90, rectangular, whole top	34,50	932,55	5,36
Pan Dining table 140x80, rectangular, whole top	32,69	872,09	5,80
Pan Dining table 120x80, rectangular, whole top	30,20	792,23	5,37
Pan Dining table Ø120	35,32	918,96	8,13
Pan Dining table Ø90	28,20	698,21	11,34
Pan Dining table 80x80 cm, rectangular, whole top	26,29	661,13	8,57

Bibliography

ISO 14025:2010 Environmental labels and declarations - Type III environmental declarations - Principles and procedures.

ISO 14044:2006 Environmental management - Life cycle assessment - Requirements and guidelines.

EN 15804:2012+A1:2013 Environmental product declaration - Core rules for the product category of construction products.

ISO 21930:2017 Sustainability in buildings and civil engineering works - Core rules for environmental product declarations of construction products.

ecoinvent v3, Allocation, cut-off by classification, Swiss Centre of Life Cycle Inventories.

lversen et al., (2018) eEPD v3.0 - Background information for EPD generator system. LCA.no report number 04.18

Vold et al., (2019) EPD generator for Norsk Industri, Background information for industry application and LCA data, LCA.no report number 06.19.

NPCR Part A: Construction products and services. Ver. 1.0. April 2017, EPD-Norge.

NPCR 026 Part B for Furniture. Ver. 2.0 October 2018, EPD-Norge.

C epd-norway	Program operator and publisher	Phone:	+47 23 08 80 00
	The Norwegian EPD Foundation	e-mail:	post@epd-norge.no
	Post Box 5250 Majorstuen, 0303 Oslo,Norway	web:	www.epd-norge.no
HELLAND	Owner of the declaration	Phone:	+47 958 09 013
	Helland Møbler AS	e-mail:	joakim.helland@helland.no
	Postboks 10 6259 Stordal	web:	www.helland.no
LCA	Author of the Life Cycle Assessment	Phone:	+47 916 50 916
	LCA.no AS	e-mail:	post@lca.no
	Dokka 6B 1671 Kråkerøy	web:	www.lca.no
LCA	Developer of EPD generator	Phone:	+47 916 50 916
	LCA.no AS	e-mail:	post@lca.no
	Dokka 1C 1671 Kråkerøy	web:	www.lca.no