

# ENVIRONMENTAL PRODUCT DECLARATION

In accordance with ISO 14025, ISO 21930 and EN 15804+A2



An average EPD for  
**Sawn timber made of spruce or pine, u 18%**



**Owner of the declaration:**  
Södra Skogsägarna ek för  
Skogsudden, 351 89 Växjö  
[www.sodra.com](http://www.sodra.com)

**Program holder and publisher**  
The Norwegian EPD Foundation

**Declaration number:**  
NEPD-6469-5732-EN

**Product category/PCR:**  
Wood and wood-based products

**Issue date:** 24.04.2024  
**Valid to:** 24.04.2029

**EPD Software:**

This EPD is based on IVL EPD Generator for the Sawmill products (NEPDT26) and follow the approved background database verification approach.

# General information

**Product:**

Sawn timber made of spruce or pine, u 18%

**Program Operator:**

The Norwegian EPD Foundation  
Post Box 5250 Majorstuen, 0303 Oslo, Norway  
Phone: +47 23 08 80 00  
Email: post@epd-norge.no

**Declaration Number:**

NEPD-6469-5732-EN

**This declaration is based on Product****Category Rules:**

CEN Standard EN 15804 A2 serves as core PCR and PCR Part B for wood and wood-based products for use in construction (NPCR 015 07.10.2021).

**Statement of liability:**

The owner of the declaration shall be liable for the underlying information and evidence. EPD Norway shall not be liable with respect to manufacturer, life cycle assessment data and evidences.

**Declared unit:**

m<sup>3</sup> sawn timber

**Declared unit with option:**

1 m<sup>3</sup> sawn timber  
A1-A5, C1-C4 and D

**Functional unit:**

1 m<sup>3</sup> sawn timber

**Verification:**

Independent verification of the declaration and data, according to ISO14025:2010.

Internal  External

Third party verifier:



Linda Høibye, Life Cycle Assessment Consulting  
Independent verifier approved by EPD Norway

**Owner of the declaration and manufacturer:**

Södra Skogsägarna ek för  
Contact person: Customer service Södra Wood  
Phone: +46 470 89920  
Email: kundservicetimber@sodra.com

**Place of production:**

Kinda, Långasjö, Mönsterås, Orrefors,  
Unnefors, Värö, Klevshult  
Sweden

**Management system etc:**

ISO 14001

**Organisation no:**

729500-3789

**Issue date:**

24.04.2024

**Valid to:**

24.04.2029

**Year of study:**


2022

**Comparability:**

EPD of construction products may not be comparable if they not comply with EN 15804 and seen in a building context.

**The EPD has been worked out by:**

Eva Gustafsson, Södra Skogsägarna ek för

**Approved by:**

Håkon Hauan  
(Managing Director EPD Norway)

# Product

## Product description:

Sawn timber is used for structural purposes, cladding and as component in wood based products. The average moisture ratio of the declared products is 18 % (EN 14298). On request, timber with a different moisture content can be delivered.

## Product specification:

Sawn timber is produced in different sizes and the declared product is representative for the average sawn timber produced by the sawmills and a mix of spruce and pine. Difference in the calculated GWP Fossil A1-A3 between a 100% single specie and a mix of each tree species respectively, is less than 4%.

| Materials, product | kg/m <sup>3</sup> | weight-% |
|--------------------|-------------------|----------|
| Spruce/whitewood   | 359               | 75%      |
| Pine/redwood       | 122               | 25%      |
|                    |                   | 0%       |
| Sum                | 481               | 100%     |

| Packaging materials | kg/m <sup>3</sup> | weight-% |
|---------------------|-------------------|----------|
| Wood                | 2,1               | 81%      |
| Polyethene film     | 0,4               | 14%      |
| Plastic strap       | 0,1               | 5%       |
| Steel strip         | 0                 | 0%       |
| Cardboard           | 0                 | 0%       |
| Sum                 | 2,6               | 100%     |

## Technical data:

Sawn timber is delivered according to qualities and sizes specified by demands on different markets. For the European market, the European EN standards and the Swedish publication 'Appearance grading of softwoods – European spruces, firs, pines, Douglas fir and larches' are typically applicable.

The raw dry mass for spruce is 384 kg/m<sup>3</sup> and 420 kg/m<sup>3</sup> for pine as Swedish averages and used here to calculate biogenic carbon content and the delivery density including water according to the current moisture content.

## Market:

Main markets are Sweden and Northern Europe.

## Reference service life:

Reference service life is normally the same as the building when not exposed for weathering, which is typically set to 50 or 60 years.



Use QR code for **fact sheet** on Swedish wood products.

# LCA: Calculation rules


## Declared unit:

1 m3 sawn timber

## System boundary:

Flow chart over production (A3) of the declared product and all other modules is shown below. Module A4 to D is further explained in the scenario section.

**Figure 1** Declared product manufacturing and transport to a customer and the remaining lifecycle.

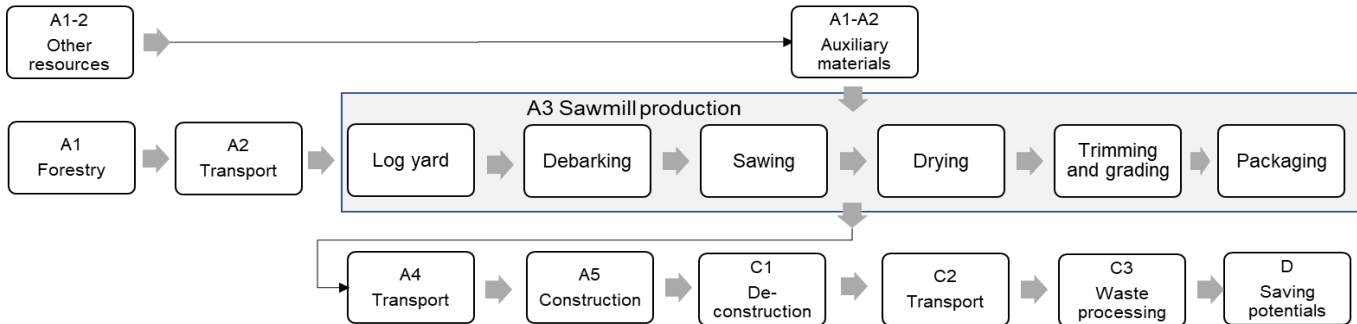

## Data quality:

The sawmill and transport use specific LCA data. Representative generic LCA data is used for the forestry. Generic upstream database data are used for energy wares and small amounts of auxiliary materials that are mainly from Gabi (age 2017-2022).

## Allocation:

The allocation is made in accordance with the provisions of EN15804. The sawmill and its multiple co-products are allocated based on their different economic values, except the drying process that is attributed to the intermediate product on physical relationship. The economic value of the different parts of the input round timber are attributed using the market value of its final products/co-products.

A conservative approach is used for transport (module A2) of round timber to the sawmill based on economic allocation factors as outlined in cPCR EN16485. A conservative economic allocation approach is used for forestry products, where no impact is allocated to the tops and branches (GROT), except forestry operations aimed for GROT (forwarding and shipping). Indicator result on potential soil quality (SQP) is assessed based on national characterisation factors for Swedish forestry (Horn et al 2021).

## Cut-off criteria:

All major raw materials and all the essential energy used are included. All production processes are included, hence the few limited cut offs that occur (<<1%): Packaging materials is not substituted in module D. This cut-off rule does not apply for hazardous materials and substances. Inherent biogenic carbon and stored energy in packaging material is balanced out directly.

## Calculation of biogenic carbon content:

Sequestration (module A1) and emissions of biogenic carbon are calculated according to EN16485:2014/EN15804+A2, where the net biogenic carbon cycle A to C is zero (i.e. carbon dioxide neutral). In this EPD, the amount of biogenic carbon stored in the product (module A3) is reported additionally (according to EN 15804 A2) as biogenic carbon stored in the product (see table 'Resource use'). For biogenic carbon in all other modules after A3, the carbon in the products is assigned to the module where the emission occurs in order to support the modularity principle in EN15804, so the net result is zero. Biogenic carbon and energy stored in packaging materials (less than 5 weight-%) are directly balanced out and therefore not visible in the environmental indicator result.

# LCA: Scenarios and additional technical information

The following information describe the scenarios in the different modules of the EPD.

## Transport from production place to user (A4)

| Type         | Load factor, % (90+0%) | Type of vehicle      | Distance km | Fuel        | Value |
|--------------|------------------------|----------------------|-------------|-------------|-------|
| Semi-trailer | 45%                    | TT/AT 28-34 + 34-40t | 300         | 0,027 l/tkm | 8,2   |

A4: The transportation is reported as 300 km and shall be used as factor to estimate the actual distance to the specific object.

## Assembly (A5)

|                                | Unit | Value   |
|--------------------------------|------|---------|
| Material loss                  | %    | 5       |
| Crane, electricity consumption | kWh  | 2,9E-02 |
| Front loader, diesel           | kWh  | 2,8E-01 |

A5: At the construction site, 4 minutes of work with front loader is assumed (Erlandsson 2015) and an average lift with a crane (Lundström 2016). 5% material loss is assumed at construction site.

## Use (B1)

|     | Unit | Value |
|-----|------|-------|
| MND |      |       |

## Maintenance (B2)/Repair (B3)

|     | Unit | Value |
|-----|------|-------|
| MND |      |       |

The declared product is not assumed to be exposed for weather and for that reason no maintenance is needed during the service life.

## Replacement (B4)/Refurbishment (B5)

|     | Unit | Value |
|-----|------|-------|
| MND |      |       |

## Operational energy (B6) and water consumption (B7)

|     | Unit | Value |
|-----|------|-------|
| MND |      |       |

No operational energy used during service life.

## End of Life (C1, C3, C4) - base scenario\*

|                                 | Unit | Value |
|---------------------------------|------|-------|
| C1: Demolition machine (diesel) | kWh  | 0,53  |
| C3: To material reuse           | kg   | 0     |
| C3: To material recycling       | kg   | 0     |
| C3: To energy recovery          | kg   | 481   |
| C3: Wood chipping (diesel)      | kWh  | 2,9   |
| C4: To landfill                 | kg   | 0     |

Energy need for demolition (C1) and chipping (C3) of the wooden discarded products according to Erlandsson et al (2015) is used. The scenario accounts for 100%\* energy recovery and end of waste is reached in C3. No statistics exist in Sweden on recycling of demolition wood but will likely be at least 90%. See also complementary scenario below.

## Transport to waste processing (C2)\*

| Type              | Load factor, % (90+0%) | Type of vehicle    | Distance km | Fuel  | Value |
|-------------------|------------------------|--------------------|-------------|-------|-------|
| Large lorry/truck | 45%                    | TT/AT 14-20+20-28t | 35          | 0,037 | 1,3   |

\*C2: Assumed transport from demolition site to local waste treatment site, from where it is then sold.

The transport assume empty return.

## Benefits and loads beyond the system boundaries (D)

### - base scenario\*

|   | Unit  | Value |
|---|-------|-------|
| Chipped discarded product that substitutes fuel in a district heating plant             | kg DM | 408   |
| Chipped discarded product that substitute average used fuel in a district heating plant | MJ    | -7833 |

D: The chipped product is assumed to be used as fuel in a district heating plant and then replaces the average energy mix. The efficiency used for allocation is 39% for electricity and 90% for heat. It is assumed that this efficiency is the same independent of the fuel used.

\* If lower recycling rate than 100% is asked for the result from module C and D shall be multiplied by such factor that takes the actual number into account. 100% is used here to support the modular approach of using these figures on the building level.

## Additional technical information

No additional information given.



# LCA: Results

The LCA results are presented for the declared unit defined on page 2 of the EPD document. EN 15804 exists in two versions and version 2 is the latest.

System boundaries: **X**=included, **MND**=module not declared, **MNR**=module not relevant.

| Product stage |           |               | Construction process stage |                                    | Use stage |             |        |             |               |                        |                       | End of life stage          |           |                  |          | Beyond the system boundary |
|---------------|-----------|---------------|----------------------------|------------------------------------|-----------|-------------|--------|-------------|---------------|------------------------|-----------------------|----------------------------|-----------|------------------|----------|----------------------------|
| Raw materials | Transport | Manufacturing | Transport                  | Construction, installation process | Use       | Maintenance | Repair | Replacement | Refurbishment | Operational energy use | Operational water use | De-construction demolition | Transport | Waste processing | Disposal | Reuse-Recovery             |
| A1            | A2        | A3            | A4                         | A5                                 | B1        | B2          | B3     | B4          | B5            | B6                     | B7                    | C1                         | C2        | C3               | C4       | D                          |
| x             | x         | x             | x                          | x                                  | MND       | MND         | MND    | MND         | MND           | MND                    | MND                   | x                          | x         | x                | x        | x                          |
| SE            | SE        | SE            | SE                         | SE                                 | —         | —           | —      | —           | —             | —                      | —                     | SE                         | SE        | SE               | SE       | SE                         |

## Core environmental impact, version A2 and EF 3.0 – mandatory indicators

| Parameter                  | Unit                   | A1-3      | A4       | A5       | C1       | C2       | C3       | C4       | D         |
|----------------------------|------------------------|-----------|----------|----------|----------|----------|----------|----------|-----------|
| GWP-total                  | kg CO <sub>2</sub> e   | -7,18E+02 | 1,21E+01 | 2,27E+00 | 1,62E-01 | 1,92E+00 | 7,51E+02 | 0,00E+00 | -1,86E+02 |
| GWP-fossil                 | kg CO <sub>2</sub> e   | 2,87E+01  | 1,18E+01 | 2,20E+00 | 1,59E-01 | 1,88E+00 | 2,75E+00 | 0,00E+00 | -1,96E+02 |
| GWP-biogenic               | kg CO <sub>2</sub> e   | -7,47E+02 | 1,49E-01 | 9,68E-03 | 2,00E-03 | 2,37E-02 | 7,48E+02 | 0,00E+00 | 1,01E+01  |
| GWP-LULUC                  | kg CO <sub>2</sub> e   | 3,55E-01  | 9,77E-02 | 2,41E-02 | 1,32E-03 | 1,56E-02 | 2,28E-02 | 0,00E+00 | -3,36E-03 |
| GWP-IOBC/GHG <sup>1)</sup> | kg CO <sub>2</sub> e   | 2,90E+01  | 1,21E+01 | 2,24E+00 | 1,62E-01 | 1,92E+00 | 2,81E+00 | 0,00E+00 | -1,76E+02 |
| ODP                        | kg CFC11 eq.           | 3,89E-07  | 1,52E-15 | 1,94E-08 | 2,05E-17 | 2,43E-16 | 3,55E-16 | 0,00E+00 | -1,22E-06 |
| AP                         | mol H <sup>+</sup> eq. | 4,42E-01  | 6,87E-02 | 2,66E-02 | 9,25E-04 | 1,10E-02 | 1,60E-02 | 0,00E+00 | -4,14E-01 |
| EP-freshwater              | kg P eq.               | 2,80E-03  | 3,54E-05 | 1,42E-04 | 4,77E-07 | 5,65E-06 | 8,25E-06 | 0,00E+00 | -3,75E-04 |
| EP-marine                  | kg N eq.               | 1,98E-01  | 3,37E-02 | 1,21E-02 | 4,53E-04 | 5,37E-03 | 7,84E-03 | 0,00E+00 | -6,24E-03 |
| EP-terrestrial             | mol N eq.              | 1,80E+00  | 3,73E-01 | 1,14E-01 | 5,02E-03 | 5,94E-02 | 8,68E-02 | 0,00E+00 | 7,95E-02  |
| POCP                       | kg NMVOC eq.           | 3,91E-01  | 6,48E-02 | 2,38E-02 | 8,73E-04 | 1,03E-02 | 1,51E-02 | 0,00E+00 | -4,06E-02 |
| ADP-m&m <sup>2)</sup>      | kg Sb eq.              | 2,32E-05  | 9,09E-07 | 1,22E-06 | 1,22E-08 | 1,45E-07 | 2,12E-07 | 0,00E+00 | -1,23E-05 |
| ADP-fossil <sup>2)</sup>   | MJ                     | 4,10E+02  | 1,59E+02 | 3,10E+01 | 2,14E+00 | 2,53E+01 | 3,70E+01 | 0,00E+00 | -1,79E+03 |
| WDP                        | m <sup>3</sup>         | 3,18E+02  | 1,04E-01 | 1,59E+01 | 1,40E-03 | 1,65E-02 | 2,41E-02 | 0,00E+00 | -3,56E+03 |

**GWP-total:** Global Warming Potential; **GWP-fossil:** Global Warming Potential fossil fuels; **GWP-biogenic:** Global Warming Potential biogenic; **GWP-LULUC:** Global Warming Potential land use and land use change; **ODP:** Depletion potential of the stratospheric ozone layer; **AP:** Acidification potential, Accumulated Exceedance; **EP-freshwater:** Eutrophication potential, fraction of nutrients reaching freshwater end compartment; **EP-marine:** Eutrophication potential, fraction of nutrients reaching freshwater end compartment; **EP-terrestrial:** Eutrophication potential, Accumulated Exceedance; **POCP:** Formation potential of tropospheric ozone; **ADP-m&m:** Abiotic depletion potential for non-fossil resources (**minerals and metals**); **ADP-fossil:** Abiotic depletion potential for fossil resources; **WDP:** Water deprivation potential, deprivation weighted water consumption

**Note 1** – This additional indicator **GWP-GHG/IOBC** is also referred to as **GWP-GHG** in the context of Swedish and Finish legislation.

**Disclaimer 2** – The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator.

## Additional environmental impact, version A2 & EF 3.0 – addition of non-mandatory indicators with poor reliability

| Parameter            | Unit              | A1-3     | A4       | A5       | C1       | C2       | C3       | C4       | D         |
|----------------------|-------------------|----------|----------|----------|----------|----------|----------|----------|-----------|
| PM <sup>2)</sup>     | Disease incidence | 2,36E-05 | 2,40E-07 | 1,20E-06 | 3,23E-09 | 3,82E-08 | 5,58E-08 | 0,00E+00 | 1,59E-02  |
| IRP <sup>1)</sup>    | kBq U235 eq       | 1,37E+00 | 2,75E-02 | 7,56E-02 | 3,71E-04 | 4,39E-03 | 6,42E-03 | 0,00E+00 | -2,86E+01 |
| ETP-fw <sup>2)</sup> | CTUe              | 5,08E+02 | 1,15E+02 | 3,29E+01 | 1,55E+00 | 1,83E+01 | 2,67E+01 | 0,00E+00 | -6,29E+02 |
| HTP-c <sup>2)</sup>  | CTUh              | 2,98E-08 | 2,32E-09 | 1,64E-09 | 3,12E-11 | 3,70E-10 | 5,40E-10 | 0,00E+00 | -1,25E-08 |
| HTP-nc <sup>2)</sup> | CTUh              | 2,42E-06 | 1,29E-07 | 1,30E-07 | 1,73E-09 | 2,05E-08 | 3,00E-08 | 0,00E+00 | -2,28E-06 |
| SQP <sup>2)</sup>    | Dimensionless     | 6,71E+04 | 5,46E+01 | 3,36E+03 | 7,35E-01 | 8,70E+00 | 1,27E+01 | 0,00E+00 | -3,64E+02 |

**PM:** Particulate matter emissions; **IRP:** Ionising radiation, human health; **ETP-fw:** Ecotoxicity (freshwater); **ETP-c:** Human toxicity, cancer effects; **HTP-nc:** Human toxicity, non-cancer effects; **SQP:** Land use related impacts / soil quality

**Disclaimer 1** – This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator.

**Disclaimer 2** – The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator.

## Environmental impact, version A1

| Parameter | Unit                               | A1-3      | A4        | A5        | C1        | C2        | C3        | C4       | D         |
|-----------|------------------------------------|-----------|-----------|-----------|-----------|-----------|-----------|----------|-----------|
| GWP-TOT   | kg CO <sub>2</sub> e               | -7,20E+02 | 1,16E+01  | 2,13E+00  | 1,57E-01  | 1,86E+00  | 7,51E+02  | 0,00E+00 | -1,87E+02 |
| GWP-IOBC* | kg CO <sub>2</sub> e               | 2,75E+01  | 1,16E+01  | 2,13E+00  | 1,57E-01  | 1,86E+00  | 2,71E+00  | 0,00E+00 | -1,87E+02 |
| ODP       | kg CFC11 e                         | 3,59E-07  | 2,04E-15  | 1,79E-08  | 2,74E-17  | 3,25E-16  | 4,75E-16  | 0,00E+00 | -1,01E-06 |
| POCP**    | kg C <sub>2</sub> H <sub>4</sub> e | 2,06E-02  | -1,80E-02 | -1,41E-04 | -2,42E-04 | -2,87E-03 | -4,19E-03 | 0,00E+00 | 1,07E-02  |
| AP        | kg SO <sub>2</sub> e               | 3,14E-01  | 4,68E-02  | 1,88E-02  | 6,31E-04  | 7,47E-03  | 1,09E-02  | 0,00E+00 | -3,88E-01 |
| EP        | kg PO <sub>4</sub> <sup>3-</sup> e | 1,01E-01  | 1,18E-02  | 5,80E-03  | 1,58E-04  | 1,88E-03  | 2,74E-03  | 0,00E+00 | 9,84E-03  |
| ADPM      | kg Sb e                            | 2,32E-05  | 9,10E-07  | 1,22E-06  | 1,23E-08  | 1,45E-07  | 2,12E-07  | 0,00E+00 | -1,52E-05 |
| ADPE      | MJ                                 | 3,85E+02  | 1,59E+02  | 2,96E+01  | 2,13E+00  | 2,53E+01  | 3,69E+01  | 0,00E+00 | -1,22E+03 |

**GWP** Global warming potential; **ODP** Depletion potential of the stratospheric ozone layer; **POCP** Formation potential of tropospheric photochemical oxidants; **AP** Acidification potential of land and water; **EP** Eutrophication potential; **ADPM** Abiotic depletion potential for non fossil resources; **ADPE** Abiotic depletion potential for fossil resources.

\* This indicator is also referred to as **GWP-GHG** in Swedish legislation and used in the Finish and Swedish mandatory generic database for building climate declarations.

\*\*LCI origin from GaBi database separates NO<sub>x</sub> into NO and NO<sub>2</sub>, in combination with the applied characterization model with a marginal approach for POCP based on highly polluted ambient air, can result in a negative characterization factor for nitric oxide.

## Resource use, version A1+A2 and EF 3.0 — mandatory indicators

| Parameter | Unit           | A1-3     | A4       | A5       | C1       | C2       | C3        | C4       | D         |
|-----------|----------------|----------|----------|----------|----------|----------|-----------|----------|-----------|
| RPEE      | MJ             | 1,82E+03 | 8,87E+00 | 9,17E+01 | 1,19E-01 | 1,41E+00 | 2,07E+00  | 0,00E+00 | 6,89E+03  |
| RPEM      | MJ             | 7,83E+03 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | -7,83E+03 | 0,00E+00 | 0,00E+00  |
| TPE       | MJ             | 9,65E+03 | 8,87E+00 | 9,17E+01 | 1,19E-01 | 1,41E+00 | -7,83E+03 | 0,00E+00 | 6,89E+03  |
| NRPE      | MJ             | 4,15E+02 | 1,59E+02 | 3,12E+01 | 2,14E+00 | 2,54E+01 | 3,71E+01  | 0,00E+00 | -1,26E+03 |
| NRPM      | MJ             | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00  | 0,00E+00 | 0,00E+00  |
| TRPE      | MJ             | 4,15E+02 | 1,59E+02 | 3,12E+01 | 2,14E+00 | 2,54E+01 | 3,71E+01  | 0,00E+00 | -1,26E+03 |
| SM        | kg             | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00  | 0,00E+00 | 0,00E+00  |
| RSF       | MJ             | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00  | 0,00E+00 | -5,03E+03 |
| NRSF      | MJ             | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00  | 0,00E+00 | -1,36E+03 |
| W         | m <sup>3</sup> | 7,55E+00 | 1,01E-02 | 3,78E-01 | 1,37E-04 | 1,62E-03 | 2,36E-03  | 0,00E+00 | 0,00E+00  |

**RPEE** Renewable primary energy resources used as energy carrier; **RPEM** Renewable primary energy resources used as raw materials; **TPE** Total use of renewable primary energy resources; **NRPE** Non renewable primary energy resources used as energy carrier; **NRPM** Non renewable primary energy resources used as materials; **TRPE** Total use of non renewable primary energy resources; **SM** Use of secondary materials; **RSF** Use of renewable secondary fuels; **NRSF** Use of non renewable secondary fuels; **W** Use of net fresh water.

Energy stored as material in the packaging materials is directly balanced out in the module it arises and stored biogenic carbon in the product is balanced out over the life cycle, exactly the same as stored biogenic carbon is reported in GWP.

## End of life — Waste, version A1+A2 and EF 3.0 — mandatory indicators

| Parameter | Unit | A1-3     | A4       | A5       | C1       | C2       | C3       | C4       | D         |
|-----------|------|----------|----------|----------|----------|----------|----------|----------|-----------|
| HW        | kg   | 2,11E-01 | 8,02E-09 | 1,06E-02 | 1,08E-10 | 1,28E-09 | 1,87E-09 | 0,00E+00 | -3,35E-08 |
| NHW       | kg   | 8,02E+00 | 2,36E-02 | 4,03E-01 | 3,18E-04 | 3,77E-03 | 5,51E-03 | 0,00E+00 | -6,79E-01 |
| RW        | kg   | 7,23E-03 | 1,92E-04 | 4,19E-04 | 2,59E-06 | 3,07E-05 | 4,48E-05 | 0,00E+00 | -2,28E-01 |

**HW** Hazardous waste disposed; **NHW** Non hazardous waste disposed; **RW** Radioactive waste disposed

## End of life — Output flow, version A1+A2 and EF 3.0 — mandatory indicators

| Parameter | Unit | A1-3     | A4       | A5       | C1       | C2       | C3       | C4       | D        |
|-----------|------|----------|----------|----------|----------|----------|----------|----------|----------|
| CR        | kg   | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| MR        | kg   | 2,04E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| MER       | kg   | 5,16E-01 | 0,00E+00 | 2,59E+00 | 0,00E+00 | 0,00E+00 | 4,81E+02 | 0,00E+00 | 0,00E+00 |
| EEE       | MJ   | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| ETE       | MJ   | 1,27E-01 | 0,00E+00 | 6,34E-03 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |

**CR** Components for reuse; **MR** Materials for recycling; **MER** Materials for energy recovery; **EEE** Exported electric energy; **ETE** Exported thermal energy

## Information describing the biogenic carbon content at the factory gate

| Biogenic carbon content                                | Amount | Unit/DU |
|--|--------|---------|
| Biogenic carbon content in product                     | 204    | kg C    |
| Biogenic carbon content in the accompanying packaging* | 0,89*  | kg C    |

44/12 is the ratio between the molecular mass of CO<sub>2</sub> and C molecules.

\* The biogenic carbon and its energy content stored in packaging materials is less than 5% and therefore according to EN 15804 directly balanced out in the environmental indicator result (i.e. set to zero for GWP and energy used as materials).

## LCA: Complementary scenario results

This section includes an alternative end of life scenario and create an information model that in combination with the main scenario reported above can be used by the end-user to define a specific scenario based on local conditions.

### Alternative 100% scenario for the scenario: Deconstruction losses

**General:** It should be noticed that landfill of organic waste such as wood is not allowed by EC legislation and the worst scenario alternative will then be the fact that the deconstruction/demolition process generate a wood fraction that will not be recycled at all. Such waste flows can be generated in the deconstruction process and where the wood is then wasted on the surface or alternative in the top soil in the ground at the construction site or elsewhere.

**C1, C2:** The demolition process C1 is the same as in the main scenario reported above. There will not be any transport C2 since the waste is lost at the site.

**C3:** The modelled scenario presented below is based on that the wood that remains on the site of the building being broken down aerobically, that is, with access to oxygen and completely decomposed within the 100-year time-related cut off that is applied. In such aerobic decomposition is the inherent carbon transformed to carbon dioxide (compared to an anaerobic process that partly also create methane).

| End of life stage          |           |                  |          | Beyond the system boundary |
|----------------------------|-----------|------------------|----------|----------------------------|
| De-construction demolition | Transport | Waste processing | Disposal | Reuse-Recovery             |
| C1                         | C2        | C3               | C4       | D                          |
| x                          | x         | x                | x        | x                          |
| SE                         | SE        | SE               | SE       | SE                         |

### Core environmental impact, version A2 and EF 3.0 – mandatory indicators

| Parameter                  | Unit                   |  |  |  | C1       | C2       | C3       | C4       | D        |
|----------------------------|------------------------|--|--|--|----------|----------|----------|----------|----------|
| GWP-total                  | kg CO <sub>2</sub> e   |  |  |  | 1,59E-01 | 0,00E+00 | 0,00E+00 | 7,48E+02 | 0,00E+00 |
| GWP-fossil                 | kg CO <sub>2</sub> e   |  |  |  | 2,00E-03 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| GWP-biogenic               | kg CO <sub>2</sub> e   |  |  |  | 1,32E-03 | 0,00E+00 | 0,00E+00 | 7,48E+02 | 0,00E+00 |
| GWP-LULUC                  | kg CO <sub>2</sub> e   |  |  |  | 1,62E-01 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| GWP-IOBC/GHG <sup>1)</sup> | kg CO <sub>2</sub> e   |  |  |  | 2,05E-17 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| ODP                        | kg CFC11 eq.           |  |  |  | 9,25E-04 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| AP                         | mol H <sup>+</sup> eq. |  |  |  | 4,77E-07 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| EP-freshwater              | kg P eq.               |  |  |  | 4,53E-04 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| EP-marine                  | kg N eq.               |  |  |  | 5,02E-03 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| EP-terrestrial             | mol N eq.              |  |  |  | 8,73E-04 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| POCP                       | kg NMVOC eq.           |  |  |  | 1,22E-08 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| ADP-m&m <sup>2)</sup>      | kg Sb eq.              |  |  |  | 2,14E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| ADP-fossil <sup>2)</sup>   | MJ                     |  |  |  | 1,40E-03 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| WDP                        | m <sup>3</sup>         |  |  |  | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |

**GWP-total:** Global Warming Potential; **GWP-fossil:** Global Warming Potential fossil fuels; **GWP-biogenic:** Global Warming Potential biogenic; **GWP-LULUC:** Global Warming Potential land use and land use change; **ODP:** Depletion potential of the stratospheric ozone layer; **AP:** Acidification potential, Accumulated Exceedance; **EP-freshwater:** Eutrophication potential, fraction of nutrients reaching freshwater end compartment; **EP-marine:** Eutrophication potential, fraction of nutrients reaching freshwater end compartment; **EP-terrestrial:** Eutrophication potential, Accumulated Exceedance; **POCP:** Formation potential of tropospheric ozone; **ADP-m&m:** Abiotic depletion potential for non-fossil resources (**minerals and metals**); **ADP-fossil:** Abiotic depletion potential for fossil resources; **WDP:** Water deprivation potential, deprivation weighted water consumption

**Note 1** – This additional indicator **GWP-GHG/IOBC** is also referred to as **GWP-GHG** in the context of Swedish and Finish legislation.

**Disclaimer 2** – The results of this environmental impact indicator shall be used with care as the uncertainties of these results are high or as there is limited experienced with the indicator.

### Additional environmental impact, version A2 & EF 3.0 – addition of non-mandatory indicators with poor reliability

| Parameter            | Unit              |  |  |  | C1       | C2       | C3       | C4       | D        |
|----------------------|-------------------|--|--|--|----------|----------|----------|----------|----------|
| PM <sup>2)</sup>     | Disease incidence |  |  |  | 3,71E-04 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| IRP <sup>1)</sup>    | kBq U235 eq       |  |  |  | 1,55E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| ETP-fw <sup>2)</sup> | CTUe              |  |  |  | 3,12E-11 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| HTP-c <sup>2)</sup>  | CTUh              |  |  |  | 1,73E-09 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| HTP-nc <sup>2)</sup> | CTUh              |  |  |  | 7,35E-01 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| SQP <sup>2)</sup>    | Dimensionless     |  |  |  | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |

**PM:** Particulate matter emissions; **IRP:** Ionising radiation, human health; **ETP-fw:** Ecotoxicity (freshwater); **ETP-c:** Human toxicity, cancer effects; **HTP-nc:** Human toxicity, non-cancer effects; **SQP:** Land use related impacts / soil quality

**Disclaimer 1** – This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator.

**Disclaimer 2** – The results of this environmental impact indicator shall be used with care as the uncertainties of these results are high or as there is limited experienced with the indicator.

### Environmental impact, version A1

| Parameter | Unit                               |  |  |  | C1        | C2       | C3       | C4       | D        |
|-----------|------------------------------------|--|--|--|-----------|----------|----------|----------|----------|
| GWP-TOT   | kg CO <sub>2</sub> e               |  |  |  | 1,57E-01  | 0,00E+00 | 0,00E+00 | 7,48E+02 | 0,00E+00 |
| GWP-IOBC* | kg CO <sub>2</sub> e               |  |  |  | 2,74E-17  | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| ODP       | kg CFC11 e                         |  |  |  | -2,42E-04 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| POCP**    | kg C <sub>2</sub> H <sub>4</sub> e |  |  |  | 6,31E-04  | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| AP        | kg SO <sub>2</sub> e               |  |  |  | 1,58E-04  | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| EP        | kg PO <sub>4</sub> <sup>3-</sup> e |  |  |  | 1,23E-08  | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| ADPM      | kg Sb e                            |  |  |  | 2,13E+00  | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| ADPE      | MJ                                 |  |  |  | 0,00E+00  | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |

**GWP** Global warming potential; **ODP** Depletion potential of the stratospheric ozone layer; **POCP** Formation potential of tropospheric photochemical oxidants; **AP** Acidification potential of land and water; **EP** Eutrophication potential; **ADPM** Abiotic depletion potential for non fossil resources; **ADPE** Abiotic depletion potential for fossil resources.

\* Also referred to as **GWP-GHG** in context of e.g. Swedish and Finish legislation.

\*\* Negative impact occur due to negative characterization factors. LCI origin from GaBi database separates NO<sub>x</sub> into NO and NO<sub>2</sub>, in combination with the applied characterization model with a marginal approach for POCP based on highly polluted ambient air than can result in a negative characterization factor for nitric oxide.

### Resource use, version A1+2 and EF 3.0 — mandatory indicators

| Parameter | Unit           |  |  |  | C1       | C2       | C3       | C4        | D        |
|-----------|----------------|--|--|--|----------|----------|----------|-----------|----------|
| RPEE      | MJ             |  |  |  | 1,19E-01 | 0,00E+00 | 0,00E+00 | 7,83E+03  | 0,00E+00 |
| RPEM      | MJ             |  |  |  | 0,00E+00 | 0,00E+00 | 0,00E+00 | -7,83E+03 | 0,00E+00 |
| TPE       | MJ             |  |  |  | 1,19E-01 | 0,00E+00 | 0,00E+00 | 0,00E+00  | 0,00E+00 |
| NRPE      | MJ             |  |  |  | 2,14E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00  | 0,00E+00 |
| NRPM      | MJ             |  |  |  | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00  | 0,00E+00 |
| TRPE      | MJ             |  |  |  | 2,14E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00  | 0,00E+00 |
| SM        | kg             |  |  |  | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00  | 0,00E+00 |
| RSF       | MJ             |  |  |  | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00  | 0,00E+00 |
| NRSF      | MJ             |  |  |  | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00  | 0,00E+00 |
| W         | m <sup>3</sup> |  |  |  | 1,37E-04 | 0,00E+00 | 0,00E+00 | 0,00E+00  | 0,00E+00 |

**RPEE** Renewable primary energy resources used as energy carrier; **RPEM** Renewable primary energy resources used as raw materials; **TPE** Total use of renewable primary energy resources; **NRPE** Non renewable primary energy resources used as energy carrier; **NRPM** Non renewable primary energy resources used as materials; **TRPE** Total use of non renewable primary energy resources; **SM** Use of secondary materials; **RSF** Use of renewable secondary fuels; **NRSF** Use of non renewable secondary fuels; **W** Use of net fresh water.

Energy stored as energy in the packaging materials is directly balanced out in the module it arises, and stored biogenic carbon in the product is balanced out over the life cycle, exactly the same as stored biogenic carbon is reported in GWP.

### End of life — Waste, version A1+2 and EF 3.0 — mandatory indicators

| Parameter | Unit |  |  |  | C1       | C2       | C3       | C4       | D        |
|-----------|------|--|--|--|----------|----------|----------|----------|----------|
| HW        | kg   |  |  |  | 3,18E-04 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| NHW       | kg   |  |  |  | 2,59E-06 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| RW        | kg   |  |  |  | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |

**HW** Hazardous waste disposed; **NHW** Non hazardous waste disposed; **RW** Radioactive waste disposed

### End of life — Output flow, version A1+2 and EF 3.0 — mandatory indicators

| Parameter | Unit |  |  |  | C1       | C2       | C3       | C4       | D        |
|-----------|------|--|--|--|----------|----------|----------|----------|----------|
| CR        | kg   |  |  |  | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| MR        | kg   |  |  |  | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| MER       | kg   |  |  |  | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| EEE       | MJ   |  |  |  | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| ETE       | MJ   |  |  |  | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |

**CR** Components for reuse; **MR** Materials for recycling; **MER** Materials for energy recovery; **EEE** Exported electric energy; **ETE** Exported thermal energy



## Additional requirements

The GWPtotal indicator result reported below is the same result as the indicator value as for GWP-IOBC/GHG.

Alternative figures are reported here that can be used to recalculate the result A1-3:

### Location based electricity mix from the use of electricity in manufacturing

| National electricity grid | Data source | Foreground /core [kWh] | GWPtotal [kg CO <sub>2</sub> e/kWh] | Sum [kg CO <sub>2</sub> e] |
|---------------------------|-------------|------------------------|-------------------------------------|----------------------------|
| Electricity grid Sweden   | Gabi        | 60,5                   | 0,042                               | 2,5                        |

The GWP result above is based on national production mix from import, low voltage (production of transmission lines, in addition to direct emissions and losses in grid) of applied electricity bought in the core manufacturing process in module A3 per declared unit.

The reported LCA result in this EPD use this approach:

### Guarantees of origin from the use of electricity in the manufacturing phase

| National electricity grid   | Data source | Foreground /core [kWh] | GWPtotal [kg CO <sub>2</sub> e/kWh] | Sum [kg CO <sub>2</sub> e] |
|---|-------------|------------------------|-------------------------------------|----------------------------|
| Electricity from a market that use source of origin that can be bought and an approved registry exists (prEN 15941) | Gabi        | 60,5                   | 0,043                               | 2,6                        |

#### The GWP result above is based on:

- Guarantee of origin (GoO) electricity used
- National residual mix electricity according to AIB

#### Data used in the upstream system that use GoO are listed below:

No such data are used.

### Hazardous substances

- The product contains no substances given by the REACH Candidate list or the Norwegian priority list.
- The product contains substances given by the REACH Candidate list or the Norwegian priority list that are less than 0,1 % by weight.
- The product contain dangerous substances, more than 0,1% by weight, given by the REACH Candidate List or the Norwegian priority list, see table below.

| Name | CAS no. | Amount |
|------|---------|--------|
| —    | —       | —      |

### Indoor environment





Not relevant

### Carbon footprint

Carbon footprint according to ISO 14067 has not been worked out for the product.

## Bibliography

|                                |  |
|--------------------------------|--|
| ISO 14025:2006                 | Environmental labels and declarations - Type III environmental declarations - Principles and procedures.   |
| ISO 14044:2006+A1:2017+A2:2020 | Environmental management - Life cycle assessment - Requirements and guidelines.  |
| EN 15804:2012+A1:2013          | Sustainability of construction works — Environmental product declaration — Core rules for the product category of construction products.                         |
| EN 15804:2012+A2:2019          | Sustainability of construction works — Environmental product declaration — Core rules for the product category of construction products.                         |
| ISO 21930:2007                 | Sustainability in building construction — Environmental declaration of building products.  |
| c-PCR NPCR 015                 | PCR Part B for wood and woodbased products for use in construction (07.10.2021).   |
| Erlandsson M, Peterson D:      | Klimatpåverkan för byggnader med olika energiprestanda. För Energimyndigheten och Boverket. IVL Svenska Miljöinstitutet, rapport nr U5176, 27 maj 2015.          |
| Horn et al                     | Land use and forestry in the environmental footprint. Fraunhofer Institute for Building Physics IBP et al, carried out on behalf of Cepi. Stuttgart, 2021-09-29. |
| Erlandsson M                   | Generic LCA report for the EPD generator: Sawmill products – As the basis for the publication of EPDs within EPD Norway. Version 1.18, IVL, January 2022.        |
| Gustafsson E                   | Supplementary LCA report for Södra, Sawn timber u 18%. IVL. February 2024.   |
| Lundström J                    | Energy consumption for different frame materials during the production phase of an apartment building. Diploma work, HT2016, BY1704, Umeå University.            |

|   |  |   |
|---|--|---|
|  | <b>Program operator and publisher</b><br>The Norwegian EPD Foundation<br>Post Box 5250 Majorstuen, 0303 Oslo<br>Norway | Phone: +47 23 08 80 00<br>e-mail: <a href="mailto:post@epd-norge.no">post@epd-norge.no</a><br>web: <a href="http://www.epd-norge.no">www.epd-norge.no</a>             |
|  | <b>Owner of the declaration</b><br>Södra Skogsägarna ek för<br>Skogsudden, 351 89 Växjö                                | Phone: +46 470 89920<br>e-mail: <a href="mailto:kundservicetimber@sodra.com">kundservicetimber@sodra.com</a><br>web: <a href="http://www.sodra.com">www.sodra.com</a> |
|  | <b>Author of the Life Cycle Assessment</b><br>Eva Gustafsson<br>Södra Skogsägarna ek för<br>Skogsudden, 351 89 Växjö   | Phone: +46 470 89920<br>e-mail: <a href="mailto:kundservicetimber@sodra.com">kundservicetimber@sodra.com</a><br>web: <a href="http://www.sodra.com">www.sodra.com</a> |
|  | <b>ECO Platform</b><br>ECO Platform<br>ECO Portal  | +46 (0) 10-788 65 00<br>web: <a href="http://www.eco-platform.org">www.eco-platform.org</a><br>web: <a href="http://ECO Portal">ECO Portal</a>                        |