




Environmental product declaration

in accordance with ISO 14025 and EN 15804+A2

JAPI-pipe

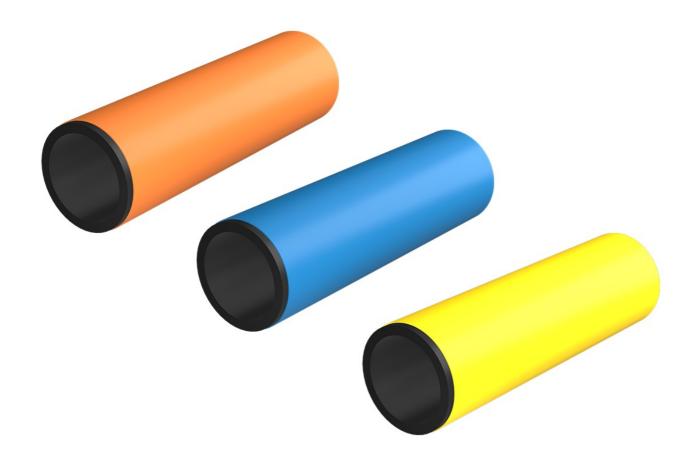



The Norwegian EPD Foundation

Owner of the declaration:

Hallingplast AS

Product:

JAPI-pipe

Declared unit:

This declaration is based on Product Category Rules: CEN Standard EN 15804:2012+A2:2019 serves as core

NPCR Part A: Construction products and services. Ver. 2.0 March 2021

Program operator:

The Norwegian EPD Foundation

Declaration number:

NEPD-6549-5791-EN

Registration number:

NEPD-6549-5791-EN

Issue date: 07.05.2024

Valid to: 07.05.2029

EPD software:

LCAno EPD generator ID: 334512



General information

Product:

JAPI-pipe

Program operator:

The Norwegian EPD Foundation
Post Box 5250 Majorstuen, 0303 Oslo, Norway

Phone: +47 977 22 020 web: www.epd-norge.no

Declaration number:

NEPD-6549-5791-EN

This declaration is based on Product Category Rules:

CEN Standard EN 15804:2012+A2:2019 serves as core PCR NPCR Part A: Construction products and services. Ver. 2.0 March

2021

Statement of liability:

The owner of the declaration shall be liable for the underlying information and evidence. EPD Norway shall not be liable with respect to manufacturer information, life cycle assessment data and evidences.

Declared unit:

1 kg JAPI-pipe

Declared unit with option:

A1-A3,A4,C1,C2,C3,C4,D

Functional unit:

Not applicable

General information on verification of EPD from EPD tools:

Independent verification of data, other environmental information and the declaration according to ISO 14025:2010, § 8.1.3 and § 8.1.4. Verification of each EPD is made according to EPD-Norway's guidelines for verification and approval requiring that tools are i) integrated into the company's environmental management system, ii) the procedures for use of the EPD tool are approved by EPD-Norway, and iii) the process is reviewed annually by an independent third party verifier. See Appendix G of EPD-Norway's General Programme Instructions for further information on EPD tools

Verification of EPD tool:

Independent third party verification of the EPD tool, background data and test-EPD in accordance with EPDNorway's procedures and guidelines for verification and approval of EPD tools.

Third party verifier:

Elisabet Amat, GREENIZE projects

(no signature required)

Owner of the declaration:

e-mail: post@hallingplast.no

Hallingplast AS Contact person: Guro L. Lilleslåtten Phone: +47 32 09 55 99

Manufacturer:

Hallingplast AS

Place of production:

Hallingplast AS Kleivi næringspark 4 3570 Ål, Norway

Management system:

NS-EN ISO 9001: 2015

Organisation no:

919 522 461

Issue date:

07.05.2024

Valid to: 07.05.2029

07.03.2023

Year of study:

2022

Comparability:

EPD of construction products may not be comparable if they not comply with EN 15804 and seen in a building context.

Development and verification of EPD:

The declaration is created using EPD tool lca.tools ver EPD2022.03, developed by LCA.no. The EPD tool is integrated in the company's management system, and has been approved by EPD Norway.

Developer of EPD: Tore Gjeldokk

Reviewer of company-specific input data and EPD: Elisabeth Hovda

Approved:

Håkon Hauan, CEO EPD-Norge



Product:

Product description:

PE 100-RC pressure pipes with peelable protective PP-layer for water supply, drains and sewer under pressure, and gaseous fuels. These pipes can be installed above ground, in trenches, in water and with trenchless technology. The pressure pipes are black or black with identification stripes. The PP-layer is coloured. The colours meet the product standards. This EPD covers both coiled pipes and pipes in straight lengths. This EPD is for black 180 mm SDR11 PE-pipe with 3,5mm blue PP-layer. For project specific EPD identifications stripes can be included. For more information: www.hallingplast.no

Product specification:

The product standards for these pressure pipes are: NS-EN 12201 and NS-EN 1555.

| Materials | kg | % |
|-------------------------------|------|--------|
| Pigments and Fillers | 0,00 | 0,18 |
| Plastic - Polyethylene (HDPE) | 0,82 | 82,40 |
| Plastic - Polypropylene (PP) | 0,17 | 17,43 |
| Total | 1,00 | 100,00 |

Technical data:

The material density for the PE-pipes are 960 kg/m3. The dimensions given for these products, i.e. diameter and wall thickness, are mean values based on the dimensions given in the product standards.

For additional technical information:

www.hallingplast.no

Market:

Mainly Norway.

Reference service life, product:

At least 100 years if installed according to manufacturer and used according to product specifications.

Reference service life, building or construction works:

According to service life of buildings.

LCA: Calculation rules

Declared unit:

1 kg JAPI-pipe

Cut-off criteria:

All major raw materials and all the essential energy is included. The production processes for raw materials and energy flows with very small amounts (less than 1%) are not included. These cut-off criteria do not apply for hazardous materials and substances.

Allocation:

The allocation is made in accordance with the provisions of EN 15804. Incoming energy and water and waste production in-house is allocated equally among all products through mass allocation. Effects of primary production of recycled materials is allocated to the main product in which the material was used. The recycling process and transportation of the material is allocated to this analysis.

Data quality:

Specific data for the product composition are provided by the manufacturer. The data represent the production of the declared product and were collected for EPD development in the year of study. Background data is based on EPDs according to EN 15804 and different LCA databases. The data quality of the raw materials in A1 is presented in the table below.

| Materials | Source | Data quality | Year |
|-------------------------------|---------------|--------------|------|
| Pigments and Fillers | ecoinvent 3.6 | Database | 2019 |
| Plastic - Polyethylene (HDPE) | ecoinvent 3.6 | Database | 2019 |
| Plastic - Polypropylene (PP) | ecoinvent 3.6 | Database | 2019 |



System boundaries (X=included, MND=module not declared, MNR=module not relevant)

| | | | uction ion stage | | | | Use stage | | | End of life stage | | | | Beyond the system boundaries | | |
|------------------|-----------|---------------|---------------------|----------|-----|-------------|-----------|-------------|---------------|------------------------------|--------------------------|-----------------------------------|-----------|------------------------------|----------|--|
| Raw materials | Transport | Manufacturing | Transport | Assembly | Use | Maintenance | Repair | Replacement | Refurbishment | Operational energy use | Operational water use | De- construction demolition | Transport | Waste processing | Disposal | Reuse-Recovery- Recycling-potential |
| A1 | A2 | A3 | A4 | A5 | B1 | B2 | В3 | B4 | B5 | В6 | В7 | C1 | C2 | C3 | C4 | D |
| Х | Х | X | X | MND | MND | MND | MND | MND | MND | MND | MND | X | Х | Х | Χ | X |


System boundary:

The system boundary for this EPD is modules A1-A4.

A4: Distance for transport from manufacturer to building site has been set to 300 km. This distance is given in newer PCRs as a default value for Norway.

A5: Has not been included, but can be provided for project specific EPD on request. This, due to various installation methods.

C1-C4: Has not been included as it is assumed that the pressure pipes are left as is after end of life.

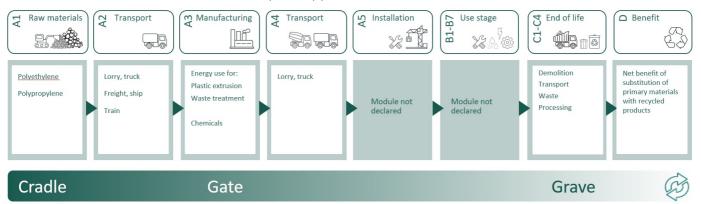

Additional technical information:

ISCC (bio circular raw material) is not included in this EPD, according to regulations given by EPD Norge.

Packaging material is not included in this EPD, but can be provided for project specific EPD on request. Hallingplast AS is continously striving to minimize the use of packaging material while delivering high quality products to the customer.

A1 has been calculated according to data from 2021, 2022 and 2023.



LCA: Scenarios and additional technical information

The following information describe the scenarios in the different modules of the EPD.

| Transport from production place to user (A4) | Capacity utilisation (incl. return) % | Distance (km) | Fuel/Energy Consumption | Unit | Value (Liter/tonne) |
|--|--|---------------|-------------------------|-------|------------------------|
| Truck, 16-32 tonnes, EURO 6 (km) - Europe | 36,7 % | 300 | 0,043 | l/tkm | 12,90 |



LCA: Results

The LCA results are presented below for the declared unit defined on page 2 of the EPD document.

| Environ | Environmental impact | | | | | | | | | | | | |
|---------------|----------------------------------|------------------------|----------|----------|----|----|----------|----|---|--|--|--|--|
| | Indicator | Unit | A1-A3 | A4 | C1 | C2 | C3 | C4 | D | | | | |
| | GWP-total | kg CO ₂ -eq | 2,16E+00 | 5,03E-02 | 0 | 0 | 0,00E+00 | 0 | 0 | | | | |
| | GWP-fossil | kg CO ₂ -eq | 2,15E+00 | 5,02E-02 | 0 | 0 | 0,00E+00 | 0 | 0 | | | | |
| | GWP-biogenic | kg CO ₂ -eq | 1,15E-02 | 2,08E-05 | 0 | 0 | 0,00E+00 | 0 | 0 | | | | |
| | GWP-luluc | kg CO ₂ -eq | 7,35E-04 | 1,79E-05 | 0 | 0 | 0,00E+00 | 0 | 0 | | | | |
| | ODP | kg CFC11 -eq | 6,65E-08 | 1,14E-08 | 0 | 0 | 0,00E+00 | 0 | 0 | | | | |
| CE CE | AP | mol H+ -eq | 8,04E-03 | 1,44E-04 | 0 | 0 | 0,00E+00 | 0 | 0 | | | | |
| - | EP-FreshWater | kg P -eq | 3,58E-05 | 4,01E-07 | 0 | 0 | 0,00E+00 | 0 | 0 | | | | |
| ** | EP-Marine | kg N -eq | 1,47E-03 | 2,86E-05 | 0 | 0 | 0,00E+00 | 0 | 0 | | | | |
| - | EP-Terrestial | mol N -eq | 1,64E-02 | 3,19E-04 | 0 | 0 | 0,00E+00 | 0 | 0 | | | | |
| | POCP | kg NMVOC -eq | 7,44E-03 | 1,22E-04 | 0 | 0 | 0,00E+00 | 0 | 0 | | | | |
| | ADP-minerals&metals ¹ | kg Sb-eq | 2,00E-05 | 1,39E-06 | 0 | 0 | 0,00E+00 | 0 | 0 | | | | |
| | ADP-fossil ¹ | MJ | 7,41E+01 | 7,59E-01 | 0 | 0 | 0,00E+00 | 0 | 0 | | | | |
| <u>%</u> | WDP ¹ | m^3 | 1,00E+02 | 7,35E-01 | 0 | 0 | 0,00E+00 | 0 | 0 | | | | |

GWP-total = Global Warming Potential total; GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment: EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted water consumption

Remarks to environmental impacts:

Hallingplast AS is continuously striving to minimize the use of packaging material while delivering high quality products to the customer. Hallingplast AS can provide bio circular pressure pipes through ISCC certification. Contact our sales representatives for more information. It is important that the customer handles wastes according to local regulations.

[&]quot;Reading example: 9,0 E-03 = 9,0*10-3 = 0,009"

^{*}INA Indicator Not Assessed

^{1.} The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator



| Additional | Additional environmental impact indicators | | | | | | | | | | | |
|---------------|--|---------------|----------|----------|----|----|----------|----|---|--|--|--|
| li | ndicator | Unit | A1-A3 | A4 | C1 | C2 | C3 | C4 | D | | | |
| | PM Disease incidence | | 6,89E-08 | 3,08E-09 | 0 | 0 | 0,00E+00 | 0 | 0 | | | |
| (101) | IRP ² | kgBq U235 -eq | 5,42E-02 | 3,32E-03 | 0 | 0 | 0,00E+00 | 0 | 0 | | | |
| | ETP-fw ¹ | CTUe | 1,26E+01 | 5,63E-01 | 0 | 0 | 0,00E+00 | 0 | 0 | | | |
| 44.* ***** | HTP-c ¹ | CTUh | 5,67E-10 | 0,00E+00 | 0 | 0 | 0,00E+00 | 0 | 0 | | | |
| 48 <u>B</u> | HTP-nc ¹ | CTUh | 1,39E-08 | 6,15E-10 | 0 | 0 | 0,00E+00 | 0 | 0 | | | |
| | SQP ¹ | dimensionless | 3,41E+00 | 5,31E-01 | 0 | 0 | 0,00E+00 | 0 | 0 | | | |

PM = Particulate Matter emissions; IRP = Ionizing radiation – human health; ETP-fw = Eco toxicity – freshwater; HTP-c = Human toxicity – cancer effects; HTP-nc = Human toxicity – non cancer effects; SQP = Potential Soil Quality Index (dimensionless)

[&]quot;Reading example: 9,0 E-03 = 9,0*10-3 = 0,009" *INA Indicator Not Assessed

^{1.} The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the

^{2.} This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator.



| Resource use | | | | | | | | | |
|--------------|----------|----------------|----------|----------|----|----|-----------|----|---|
| | ndicator | Unit | A1-A3 | A4 | C1 | C2 | C3 | C4 | D |
| | PERE | MJ | 3,12E+00 | 1,09E-02 | 0 | 0 | 0,00E+00 | 0 | 0 |
| | PERM | MJ | 0,00E+00 | 0,00E+00 | 0 | 0 | 0,00E+00 | 0 | 0 |
| Ţ, | PERT | MJ | 3,12E+00 | 1,09E-02 | 0 | 0 | 0,00E+00 | 0 | 0 |
| | PENRE | MJ | 3,54E+01 | 7,59E-01 | 0 | 0 | 0,00E+00 | 0 | 0 |
| | PENRM | MJ | 4,18E+01 | 0,00E+00 | 0 | 0 | -4,08E+01 | 0 | 0 |
| I | PENRT | MJ | 7,72E+01 | 7,59E-01 | 0 | 0 | -4,08E+01 | 0 | 0 |
| | SM | kg | 2,66E-05 | 0,00E+00 | 0 | 0 | 0,00E+00 | 0 | 0 |
| 2 | RSF | MJ | 7,46E-02 | 3,89E-04 | 0 | 0 | 0,00E+00 | 0 | 0 |
| | NRSF | MJ | 1,75E-02 | 1,39E-03 | 0 | 0 | 0,00E+00 | 0 | 0 |
| % | FW | m ³ | 3,84E-02 | 8,12E-05 | 0 | 0 | 0,00E+00 | 0 | 0 |

PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non renewable primary energy resources used as raw materials; PENRM = Use of non renewable primary energy resources; SM = Use of secondary materials; PENRM = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Net use of fresh water

"Reading example: 9,0 E-03 = 9,0*10-3 = 0,009" *INA Indicator Not Assessed



| End of life - Waste | | | | | | | | | | | | |
|---------------------|------|-------|----------|----------|----|----|----------|---|---|--|--|--|
| In | Unit | A1-A3 | A4 | C1 | C2 | C3 | C4 | D | | | | |
| | HWD | kg | 2,18E-03 | 3,92E-05 | 0 | 0 | 0,00E+00 | 0 | 0 | | | |
| Ū | NHWD | kg | 1,37E-01 | 3,69E-02 | 0 | 0 | 0,00E+00 | 0 | 0 | | | |
| 3 | RWD | kg | 5,04E-05 | 5,17E-06 | 0 | 0 | 0,00E+00 | 0 | 0 | | | |

HWD = Hazardous waste disposed; NHWD = Non-hazardous waste disposed; RWD = Radioactive waste disposed

"Reading example: 9,0 E-03 = 9,0*10-3 = 0,009" *INA Indicator Not Assessed

| End of life - Output flo | End of life - Output flow | | | | | | | | | | | |
|--------------------------|---------------------------|------|----------|----------|----|----|----------|----|---|--|--|--|
| Indicate | or | Unit | A1-A3 | A4 | C1 | C2 | C3 | C4 | D | | | |
| ∅> | CRU | kg | 0,00E+00 | 0,00E+00 | 0 | 0 | 0,00E+00 | 0 | 0 | | | |
| \$> | MFR | kg | 1,48E-03 | 0,00E+00 | 0 | 0 | 0,00E+00 | 0 | 0 | | | |
| DØ | MER | kg | 3,76E-03 | 0,00E+00 | 0 | 0 | 0,00E+00 | 0 | 0 | | | |
| 5₽ | EEE | MJ | 2,40E-03 | 0,00E+00 | 0 | 0 | 0,00E+00 | 0 | 0 | | | |
| DB | EET | MJ | 3,62E-02 | 0,00E+00 | 0 | 0 | 0,00E+00 | 0 | 0 | | | |

CRU = Components for re-use; MFR = Materials for recycling; MER = Materials for energy recovery; EEE = Exported energy electrical; EET = Exported energy thermal

"Reading example: 9,0 E-03 = 9,0*10-3 = 0,009" *INA Indicator Not Assessed

| Biogenic Carbon Content | | | | | | | | | |
|-------------------------|---------------------|--|--|--|--|--|--|--|--|
| Unit | At the factory gate | | | | | | | | |
| kg C | 0,00E+00 | | | | | | | | |
| kg C | 0,00E+00 | | | | | | | | |
| | kg C | | | | | | | | |

Note: 1 kg biogenic carbon is equivalent to 44/12 kg CO2



Additional requirements

Greenhouse gas emissions from the use of electricity in the manufacturing phase:

National production mix from import, low voltage (production of transmission lines, in addition to direct emissions and losses in grid) of applied electricity for the manufacturing process (A3).

| Electricity mix | Source | Amount | Unit |
|---------------------------|---------------|--------|--------------|
| Electricity, Norway (kWh) | ecoinvent 3.6 | 24,33 | g CO2-eg/kWh |

Dangerous substances:

The product contains no substances given by the REACH Candidate list.

Indoor environment:

Not relevant.

Additional Environmental Information

| Additional environmental impact indicators required in NPCR Part A for construction products | | | | | | | | | |
|--|------------------------|----------|----------|----|----|----------|----|---|--|
| Indicator | Unit | A1-A3 | A4 | C1 | C2 | C3 | C4 | D | |
| GWPIOBC | kg CO ₂ -eq | 2,04E+00 | 5,03E-02 | 0 | 0 | 0,00E+00 | 0 | 0 | |

GWP-IOBC: Global warming potential calculated according to the principle of instantaneous oxidation. In order to increase the transparency of biogenic carbon contribution to climate impact, the indicator GWP-IOBC is required as it declares climate impacts calculated according to the principle of instantaneous oxidation. GWP-IOBC is also referred to as GWP-GHG in context to Swedish public procurement legislation.



Bibliography

ISO 14025:2010 Environmental labels and declarations - Type III environmental declarations - Principles and procedures.

ISO 14044:2006 Environmental management - Life cycle assessment - Requirements and guidelines.

EN 15804:2012 + A2:2019 Environmental product declaration - Core rules for the product category of construction products.

ISO 21930:2017 Sustainability in buildings and civil engineering works - Core rules for environmental product declarations of construction products.

ecoinvent v3, Allocation, cut-off by classification, Swiss Centre of Life Cycle Inventories.

Iversen et al., (2021) eEPD v2021.09 Background information for EPD generator tool system verification, LCA.no Report number: 07.21 Graafland, J. and Ruttenborg, M. (2023) EPD generator for Plastic products, Background information for EPD generator application and LCA data, LCA.no report number: 06.23

NPCR Part A: Construction products and services. Ver. 2.0. March 2021, EPD-Norge.

| | nd norway | Program operator and publisher: | Phone: +47 977 22 020 |
|------|----------------------|---|-----------------------------------|
| | pd-norway | The Norwegian EPD Foundation | e-mail: post@epd-norge.no |
| Glob | bal Program Operator | Post Box 5250 Majorstuen, 0303 Oslo, Norway | web: www.epd-norge.no |
| | | Owner of the declaration: | Phone: +47 32 09 55 99 |
| | HALLINGPLAST | Hallingplast AS | e-mail: post@hallingplast.no |
| | | Kleivi næringspark 4, 3570 Ål | web: https://www.hallingplast.no/ |
| | (LCA) | Author of the Life Cycle Assessment: | Phone: +47 916 50 916 |
| | | LCA.no AS | e-mail: post@lca.no |
| | | Dokka 6B, 1671 | web: www.lca.no |
| | (LCA) | Developer of EPD generator: | Phone: +47 916 50 916 |
| | | LCA.no AS | e-mail: post@lca.no |
| | | Dokka 6B,1671 Kråkerøy | web: www.lca.no |
| | CCO PLATFORM | ECO Platform | web: www.eco-platform.org |
| | | ECO Portal | web: ECO Portal |
| | | | |