



# Environmental product declaration

in accordance with ISO 14025 and EN 15804+A2

PP Sewer and Storm Water pipe (non-pressure)





Owner of the declaration:

Hallingplast AS

PP Sewer and Storm Water pipe (non-pressure)

**Declared unit:** 

1 kg

This declaration is based on Product Category Rules:

CEN Standard EN 15804:2012+A2:2019 serves as core

NPCR 019:2022 Part B for Piping systems use in sewage and storm water systems (under gravity)

Program operator:

The Norwegian EPD Foundation

**Declaration number:** 

NEPD-6551-5790-EN

Registration number:

NEPD-6551-5790-EN

**Valid to:** 07.05.2024

**EPD** software:

LCAno EPD generator ID: 326101

The Norwegian EPD Foundation



# **General information**

#### **Product**

PP Sewer and Storm Water pipe (non-pressure)

## **Program operator:**

The Norwegian EPD Foundation
Post Box 5250 Majorstuen, 0303 Oslo, Norway

Phone: +47 977 22 020 web: www.epd-norge.no

# **Declaration number:**

NEPD-6551-5790-EN

## This declaration is based on Product Category Rules:

CEN Standard EN 15804:2012+A2:2019 serves as core PCR NPCR 019:2022 Part B for Piping systems use in sewage and storm water systems (under gravity)

#### Statement of liability:

The owner of the declaration shall be liable for the underlying information and evidence. EPD Norway shall not be liable with respect to manufacturer information, life cycle assessment data and evidences.

#### **Declared unit:**

1 kg PP Sewer and Storm Water pipe (non-pressure)

# Declared unit (cradle to gate) with option:

A1-A3,A4,A5,C1,C2,C3,C4,D

# **Functional unit:**

Not applicable.

# General information on verification of EPD from EPD tools:

Independent verification of data, other environmental information and the declaration according to ISO 14025:2010, § 8.1.3 and § 8.1.4. Verification of each EPD is made according to EPD-Norway's guidelines for verification and approval requiring that tools are i) integrated into the company's environmental management system, ii) the procedures for use of the EPD tool are approved by EPD-Norway, and iii) the process is reviewed annually by an independent third party verifier. See Appendix G of EPD-Norway's General Programme Instructions for further information on EPD tools

# **Verification of EPD tool:**

Independent third party verification of the EPD tool, background data and test-EPD in accordance with EPDNorway's procedures and guidelines for verification and approval of EPD tools.

Third party verifier:

Elisabet Amat, GREENIZE projects

(no signature required)

#### Owner of the declaration:

Hallingplast AS Contact person: Guro L. Lilleslåtten Phone: +47 32 09 55 99 e-mail: post@hallingplast.no

#### Manufacturer:

Hallingplast AS

#### Place of production:

Hallingplast AS Kleivi næringspark 4 3570 Ål, Norway

## Management system:

NS-EN ISO 9001: 2015

#### **Organisation no:**

919 522 461

#### Issue date:

07.05.2024

## Valid to:

07.05.2029

## Year of study:

2022

# **Comparability:**

EPD of construction products may not be comparable if they not comply with EN 15804 and seen in a building context.

# **Development and verification of EPD:**

The declaration is created using EPD tool lca.tools ver EPD2022.03, developed by LCA.no. The EPD tool is integrated in the company's management system, and has been approved by EPD Norway.

Developer of EPD: Tore Gjeldokk

Reviewer of company-specific input data and EPD: Jonas Hegerholm

# Approved:

Håkon Hauan, CEO EPD-Norge



# **Product**

# **Product description:**

PP sewer and storm water pipes for all non-pressure underground sewer and storm water systems. The PP pipes are orange-brown or black according to the product standards.

This EPD is for orange-brown pipes, and representative for all dimensions. Project specific EPD for other colours can be provided. For more information: www.hallingplast.no

# **Product specification**

The product standard for these non-pressure pipes is NS-EN 1852.

Materials	kg	%
Pigments and Fillers	0,01	0,97
Plastic - Polypropylene (PP)	0,99	98,70
Rubber, synthetic	0,00	0,33
Total	1,00	100,00

#### **Technical data:**

The material density for these products is 900 kg/m3. The dimensions given for these products, i.e. diameter and wall thickness, are mean values based on the dimensions given in the product standards.

For additional technical information:

www.hallingplast.no

#### Market:

Mainly Norway.

## Reference service life, product

At least 100 years if installed according to manufacturer and used according to product specifications.

## Reference service life, building

According to service life of buildings.

# LCA: Calculation rules

# **Declared unit:**

1 kg PP Sewer and Storm Water pipe (non-pressure)

## Cut-off criteria:

All major raw materials and all the essential energy is included. The production processes for raw materials and energy flows with very small amounts (less than 1%) are not included. These cut-off criteria do not apply for hazardous materials and substances.

## Allocation

The allocation is made in accordance with the provisions of EN 15804. Incoming energy and water and waste production in-house is allocated equally among all products through mass allocation. Effects of primary production of recycled materials is allocated to the main product in which the material was used. The recycling process and transportation of the material is allocated to this analysis.

# Data quality:

Specific data for the product composition are provided by the manufacturer. They represent the production of the declared product and were collected for EPD development in the year of study. Background data is based on registered EPDs according to EN 15804, Ostfold Research databases, ecoinvent and other LCA databases. The data quality of the raw materials in A1 is presented in the table below.

Materials	Source	Data quality	Year
Pigments and Fillers	ecoinvent 3.6	Database	2019
Plastic - Polypropylene (PP)	ecoinvent 3.6	Database	2019
Rubber, synthetic	ecoinvent 3.6	Database	2019



# System boundaries (X=included, MND=module not declared, MNR=module not relevant)

	Product stage Construction installation stage				Use stage						End of life stage				Beyond the system boundaries		
wie Q	materials	Transport	Manufacturing	Transport	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De- construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery- Recycling-potential
	A1	A2	A3	A4	A5	B1	B2	В3	B4	B5	В6	В7	C1	C2	C3	C4	D
	Χ	Х	Х	X	X	MND	MND	MND	MND	MND	MND	MND	X	Х	Х	Х	X


# System boundary:

The system boundary for this EPD is modules A1-A4.

A4: Distance for transport from manufacturer to building site has been set to 300 km. This distance is given in newer PCRs as a default value for Norway.

A5: Has not been included, but can be provided for project specific EPD on request. This, due to various installation practices.

C1-C4: Has not been included as it is assumed that the pipes are left as is after end of life.

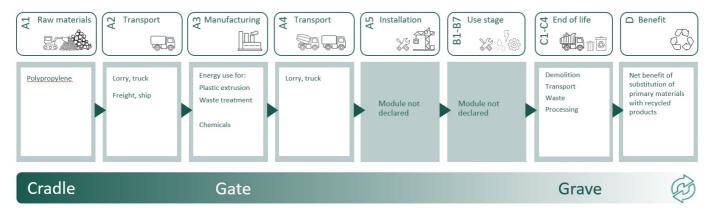

# Additional technical information:

This EPD uses 1 kg as declared unit.

ISCC (bio circular raw material) is not included in this EPD, according to regulations given by EPD Norge. Packaging material is not included in this EPD, but can be provided for project specific EPD on request. Hallingplast AS is continously striving to minimize the use of packaging material while delivering high quality products to the customer.



# LCA: Scenarios and additional technical information

The following information describe the scenarios in the different modules of the EPD.

Transport from production place to user (A4)	Capacity utilisation (incl. return) %	Distance (km)	Fuel/Energy Consumption	Unit	Value (Liter/tonne)
Truck, 16-32 tonnes, EURO 6 (km) - Europe	36,7 %	300	0,043	l/tkm	12,90



## **LCA: Results**

The LCA results are presented below for the declared unit defined on page 2 of the EPD document.

Enviro	Environmental impact											
	Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D		
	GWP-total	kg CO <sub>2</sub> -eq	2,21E+00	5,03E-02	0	0	0	0,00E+00	0	0		
	GWP-fossil	kg CO <sub>2</sub> -eq	2,20E+00	5,02E-02	0	0	0	0,00E+00	0	0		
	GWP-biogenic	kg CO <sub>2</sub> -eq	1,02E-02	2,08E-05	0	0	0	0,00E+00	0	0		
	GWP-luluc	kg CO <sub>2</sub> -eq	6,49E-04	1,79E-05	0	0	0	0,00E+00	0	0		
Ö	ODP	kg CFC11 -eq	6,79E-08	1,14E-08	0	0	0	0,00E+00	0	0		
Œ.	АР	mol H+ -eq	8,66E-03	1,44E-04	0	0	0	0,00E+00	0	0		
	EP-FreshWater	kg P -eq	3,26E-05	4,01E-07	0	0	0	0,00E+00	0	0		
	EP-Marine	kg N -eq	1,52E-03	2,86E-05	0	0	0	0,00E+00	0	0		
-	EP-Terrestial	mol N -eq	1,69E-02	3,19E-04	0	0	0	0,00E+00	0	0		
	POCP	kg NMVOC -eq	7,35E-03	1,22E-04	0	0	0	0,00E+00	0	0		
	ADP-minerals&metals <sup>1</sup>	kg Sb-eq	2,38E-05	1,39E-06	0	0	0	0,00E+00	0	0		
	ADP-fossil <sup>1</sup>	MJ	7,62E+01	7,59E-01	0	0	0	0,00E+00	0	0		
<u>%</u>	WDP <sup>1</sup>	m <sup>3</sup>	9,19E+01	7,35E-01	0	0	0	0,00E+00	0	0		

GWP-total = Global Warming Potential total; GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment: EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted water consumption

# Remarks to environmental impacts

Hallingplast AS is continuously striving to minimize the use of packaging material while delivering high quality products to the customer. Hallingplast AS can provide fossil free PP pipes through ISCC certification. Contact our sales representatives for more information. It is important that the customer handles wastes according to local regulations.

<sup>&</sup>quot;Reading example: 9,0 E-03 = 9,0\*10-3 = 0,009"

<sup>\*</sup>INA Indicator Not Assessed

<sup>1.</sup> The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator



Addition	al environme	ntal impact indicators								
In	dicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
	PM	Disease incidence	7,47E-08	3,08E-09	0	0	0	0,00E+00	0	0
	IRP <sup>2</sup>	kgBq U235 -eq	5,11E-02	3,32E-03	0	0	0	0,00E+00	0	0
	ETP-fw <sup>1</sup>	CTUe	1,21E+01	5,63E-01	0	0	0	0,00E+00	0	0
40.	HTP-c <sup>1</sup>	CTUh	5,11E-10	0,00E+00	0	0	0	0,00E+00	0	0
48	HTP-nc <sup>1</sup>	CTUh	1,44E-08	6,15E-10	0	0	0	0,00E+00	0	0
	SQP <sup>1</sup>	dimensionless	4,09E+00	5,31E-01	0	0	0	0,00E+00	0	0

PM = Particulate Matter emissions; IRP = Ionizing radiation – human health; ETP-fw = Eco toxicity – freshwater; HTP-c = Human toxicity – cancer effects; HTP-nc = Human toxicity – non cancer effects; SQP = Soil Quality (dimensionless)

<sup>&</sup>quot;Reading example: 9,0 E-03 = 9,0\*10-3 = 0,009" \*INA Indicator Not Assessed

<sup>1.</sup> The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator

<sup>2.</sup> This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator.



Resource use										
lr	ndicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
i j	PERE	MJ	3,05E+00	1,09E-02	0	0	0	0,00E+00	0	0
	PERM	МЈ	0,00E+00	0,00E+00	0	0	0	0,00E+00	0	0
್ಕ್ಯ	PERT	МЈ	3,05E+00	1,09E-02	0	0	0	0,00E+00	0	0
	PENRE	МЈ	4,54E+01	7,59E-01	0	0	0	0,00E+00	0	0
el.	PENRM	МЈ	3,35E+01	0,00E+00	0	0	0	-3,27E+01	0	0
<b>I</b>	PENRT	МЈ	7,89E+01	7,59E-01	0	0	0	-3,27E+01	0	0
	SM	kg	2,98E-04	0,00E+00	0	0	0	0,00E+00	0	0
2	RSF	МЈ	6,48E-02	3,89E-04	0	0	0	0,00E+00	0	0
	NRSF	МЈ	1,63E-02	1,39E-03	0	0	0	0,00E+00	0	0
<b>6</b> 6	FW	$m^3$	3,62E-02	8,12E-05	0	0	0	0,00E+00	0	0

PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non renewable primary energy resources used as raw materials; PENRM = Use of non renewable primary energy resources; SM = Use of secondary materials; PENRM = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Net use of fresh water

"Reading example: 9,0 E-03 = 9,0\*10-3 = 0,009" \*INA Indicator Not Assessed



End of life - Wa	End of life - Waste												
In	dicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D			
	HWD	kg	2,16E-03	3,92E-05	0	0	0	0,00E+00	0	0			
Ū	NHWD	kg	2,10E-01	3,69E-02	0	0	0	0,00E+00	0	0			
8	RWD	kg	4,94E-05	5,17E-06	0	0	0	0,00E+00	0	0			

HWD = Hazardous waste disposed; NHWD = Non-hazardous waste disposed; RWD = Radioactive waste disposed

"Reading example: 9,0 E-03 = 9,0\*10-3 = 0,009" \*INA Indicator Not Assessed

End of life - Outpu	End of life - Output flow													
Indicat	tor	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D				
<b>@</b> D	CRU	kg	0,00E+00	0,00E+00	0	0	0	0,00E+00	0	0				
\$>	MFR	kg	1,72E-03	0,00E+00	0	0	0	0,00E+00	0	0				
DØ	MER	kg	3,76E-03	0,00E+00	0	0	0	0,00E+00	0	0				
50	EEE	MJ	2,44E-03	0,00E+00	0	0	0	0,00E+00	0	0				
D	EET	MJ	3,69E-02	0,00E+00	0	0	0	0,00E+00	0	0				

CRU = Components for re-use; MFR = Materials for recycling; MER = Materials for energy recovery; EEE = Exported energy electrical; EET = Exported energy thermal

"Reading example: 9,0 E-03 = 9,0\*10-3 = 0,009" \*INA Indicator Not Assessed

Biogenic Carbon Content										
Unit	At the factory gate									
kg C	0,00E+00									
kg C	0,00E+00									
	kg C									

Note: 1 kg biogenic carbon is equivalent to 44/12 kg CO2



# **Additional requirements**

# Greenhouse gas emissions from the use of electricity in the manufacturing phase

National production mix from import, low voltage (production of transmission lines, in addition to direct emissions and losses in grid) of applied electricity for the manufacturing process (A3).

Electricity mix	Source	Amount	Unit
Electricity, Norway (kWh)	ecoinvent 3.6	24,33	g CO2-eg/kWh

# **Dangerous substances**

The product contains no substances given by the REACH Candidate list.

#### **Indoor environment**

Not relevant.

# **Additional Environmental Information**

Additional environmer	ntal impact indicators req	uired in NF	PCR Part A	for constru	ction prod	ucts			
Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
GWPIOBC	kg CO <sub>2</sub> -eq	2,08E+00	5,03E-02	0	0	0	0,00E+00	0	0

GWP-IOBC: Global warming potential calculated according to the principle of instantaneous oxidation. In order to increase the transparency of biogenic carbon contribution to climate impact, the indicator GWP-IOBC is required as it declares climate impacts calculated according to the principle of instantaneous oxidation. GWP-IOBC is also referred to as GWP-GHG in context to Swedish public procurement legislation.



# **Bibliography**

ISO 14025:2010 Environmental labels and declarations - Type III environmental declarations - Principles and procedures.

ISO 14044:2006 Environmental management - Life cycle assessment - Requirements and guidelines.

EN 15804:2012 + A2:2019 Environmental product declaration - Core rules for the product category of construction products.

ISO 21930:2017 Sustainability in buildings and civil engineering works - Core rules for environmental product declarations of construction products.

ecoinvent v3, Allocation, cut-off by classification, Swiss Centre of Life Cycle Inventories.

Iversen et al., (2021) eEPD v2021.09 Background information for EPD generator tool system verification, LCA.no report number: 07.21.

Ruttenborg et al., (2023) EPD generator for NPCR019:2022 - Background information for EPD generator application and LCA data, LCA.no report number: 04.23.

NPCR Part A: Construction products and services. Ver. 2.0. March 2021, EPD-Norge.

NPCR 019:2022 Part B for Piping systems use in sewage and storm water systems (under gravity). Ver. 2.0 May 2022, EPD-Norge.

@ and narway	Program operator and publisher	Phone: +47 977 22 020
© epd-norway	The Norwegian EPD Foundation	e-mail: post@epd-norge.no
Global Program Operator	Post Box 5250 Majorstuen, 0303 Oslo, Norway	web: www.epd-norge.no
IIIL_	Owner of the declaration:	Phone: +47 32 09 55 99
HALLINGPLAST	Hallingplast AS	e-mail: post@hallingplast.no
III	Kleivi næringspark 4, 3570 Ål	web: https://www.hallingplast.no/
	Author of the Life Cycle Assessment	Phone: +47 916 50 916
(LCA)	LCA.no AS	e-mail: post@lca.no
.no	Dokka 6B, 1671	web: www.lca.no
	Developer of EPD generator	Phone: +47 916 50 916
(LCA)	LCA.no AS	e-mail: post@lca.no
.no	Dokka 6B,1671 Kråkerøy	web: www.lca.no
ECD PLATFORM	ECO Platform	web: www.eco-platform.org
VERIFIED	ECO Portal	web: ECO Portal