

ECO Platform reference number:

ENVIRONMENTAL PRODUCT DECLARATION

in accordance with ISO 14025, ISO 21930 and EN 15804

Owner of the declaration:

Program operator:

Publisher:

Declaration number:

Registration number:

Kinnarps AB

The Norwegian EPD Foundation

The Norwegian EPD Foundation

NEPD-3609-2539-EN

NEPD-3609-2539-EN

 Issue date:
 30.06.2022

 Valid to:
 30.06.2027

Task Chair Plus[6]/[8]

Kinnarps AB

Kinnarps_

www.epd-norge.no





General information

Product:

Owner of the declaration:

Kinnarps AB

Contact person: Johanna Ljunggren - Corporate Sustainability Manager

Phone: +46 515 381 21

e-mail: johanna.ljunggren@kinnarps.se

Program operator:

Task Chair Plus[6]/[8]

The Norwegian EPD Foundation Pb. 5250 Majorstuen, 0303 Oslo Phone: +47 23 08 80 00 e-mail: post@epd-norge.no Manufacturer:

Kinnarps AB

Declaration number:

NEPD-3609-2539-EN

Place of production:

Kinnarps AB

Industrigatan 521 88 Kinnarp

Sweden

ECO Platform reference number:

Management system:

ISO 9001, ISO 14001, ISO 45001, FSC® (C010544)

This declaration is based on Product Category Rules:

CEN Standard EN 15804:2012+A1:2013 serves as core PCR NPCR 026:2018 Part B for furniture

Organisation no:

556256-6736

Statement of liability:

The owner of the declaration shall be liable for the underlying information and evidence. EPD Norway shall not be liable with respect to manufacturer information, life cycle assessment data and evidences.

Issue date:

30.06.2022

Valid to:

30.06.2027

Declared unit:

1 Pcs Task Chair Plus[6]/[8]

Year of study:

2022

Declared unit with option:

Comparability:

EPDs from programmes other than the Norwegian EPD Foundation may not be comparable

A1,A2,A3,A4

Functional unit:

Development and verification of EPD:

The declaration has been developed and verified using EPD tool lca.tools ver EPD2020.11, developed by LCA.no AS. The EPD tool is integrated into the company's environmental management system, and has been approved by EPD-Norway

Independent verification of data, other environmental information and

Developer of EPD:

Isabell Vesterberg

Reviewer of company-specific input data and EPD:

Rickard Thil

Verification of EPD tool:

Independent third party verification of the EPD tool, background data and test-EPD in accordance with EPDNorway's procedures and guidelines for verification and approval of EPD tools.

the declaration according to ISO 14025:2010, § 8.1.3 and § 8.1.4. Individual

third party verification of each EPD is not required when the EPD tool is i) integrated into the company's environmental management system, ii) the procedures for use of the EPD tool are approved by EPDNorway, and iii)

the proccess is reviewed annualy. See Appendix G of EPD-Norway's General Programme Instructions for further information on EPD tools.

General information on verification of EPD from EPD tools:

Approved:

Sign

Erik Svanes, Norsus AS

(no signature required)

Håkon Hauan, CEO EPD-Norge

Key environmental indicators	Unit	Cradle to gate A1 - A3
Global warming	kg CO2 eqv	81,29
Total energy use	MJ	1668,04
Amount of recycled materials	%	21,58



Product

Market:

Mainly Europe, but is available world wide.

Product description:

Plus[6] task chair with upholstered seat and low back. FreeFloat™ mechanism and black plastic starbase. The data applies for castors made for soft floors as well as for hard floors. Fabric consisting of 95 % wool and 5 % polyamide. Headrest and armrests as options.

The Plus high performance task chair is a classic in Swedish ergonomic design. With a focus on natural movement and active seating, it offers excellent flexibility, so although you may be seated you're never sitting still. This stylish task chair can be found in the most diverse environments - from regular office workstations to laboratories and rough manufacturing environments.

Link to product description:

https://www.kinnarps.com/products/seating/task-chairs/plus/

Product specification

The Plus task chair is available with two different mechanisms for active seating. Plus[6] with FreeFloat™; where the seat and back move independently of each other with lockable function in any position and adjustable tilting resistance. Plus[8] with Synchrone; when tilting the chair, the back is angled more than the seat. Lockable tilting movement in any position and adjustable tilting resistance.

Technical data:

The Plus [6] task chair is certified according the following environmental and quality standards: Möbelfakta, GS, NF Environnement, NF OEC. Some executions are also certified according to Nordic Swan.

The Plus [8] task chair is certified according to the following environmental and quality standards: Möbelfakta, GS, NF Environnement, NF OEC.

Fulfilled technical standards:

EN 1335-1 Dimensions

EN 1335-2 Safety requirements

EN 1335-3 Safety test methods, tested against 110 kg personnel weight

Fulfilled fire requirements:

EN 1021-1 Assessment of the ignitability of upholstered furniture – part 1: Ignition source smouldering cigarette, with Kinnarps standard fabrics EN 1021-2 Assessment of the ignitability of upholstered furniture – part 2: Ignition source match flame equivalent, with Kinnarps standard fabrics

Reference service life, product

10 years (5 years warranty)

Reference service life, building

Materials	kg	%	Recycled share in material (kg)	Recycled share in material (%)
Metal - Aluminium	1,92	10,43	1,46	75,99
Metal - Steel	9,62	52,36	2,21	22,98
Metal - Zinc	0,03	0,16	0,00	0,00
Textile - Wool	0,61	3,32	0,00	0,00
Glass fibre	0,28	1,55	0,28	100,00
Plastic - Polyurethane (PUR)	1,89	10,29	0,00	0,00
Plastic - Polypropylene (PP)	1,61	9,09	0,00	0,00
Plastic - Polystyrene expandable (EPS)	0,01	0,03	0,00	0,00
Plastic - Polyoxymethylene (POM)	0,09	0,51	0,00	0,00
Powder coating	0,03	0,16	0,00	0,00
Plastic - Nylon (PA)	0,33	1,77	0,00	0,01
Plastic - Polyamide with glass fibre (PAGF30)	1,89	10,31	0,00	0,00
Total:	18,31		3,95	

LCA: Calculation rules

Declared unit:

1 Pcs Task Chair Plus[6]/[8]

Cut-off criteria:

All major raw materials and all the essential energy is included. The production processes for raw materials and energy flows with very small amounts (less than 1%) are not included. These cut-off criteria do not apply for hazardous materials and substances.

Allocation:

The allocation is made in accordance with the provisions of EN 15804. Effects of primary production of recycled materials is allocated to the main product in which the material was used. The recycling process and transportation of the material is allocated to this analysis.

Data quality:

Specific data for the product composition are provided by the manufacturer. They represent the production of the declared product and were collected for EPD development in the year of study. Background data is based on registered EPDs according to EN 15804, Ostfold Research databases, ecoinvent and other LCA databases. The data quality of the raw materials in A1 is presented in the table below.


Specific data for the manufacturing processes (product stage A3) refers to the year 2020. All other specific data is from year of study.



System boundary:

The upholstering and certain plastic components are manufactured at Kinnarps' production site in Skillingaryd, where the fabric is also processed. Certain steel components are manufactured at Kinnarps' production site in Jönköping and some are purchased as premanufactured components. Final assembly of the product is done at Kinnarps' production site in Kinnarp.

The flow chart below illustrates the system boundaries of the analysis.

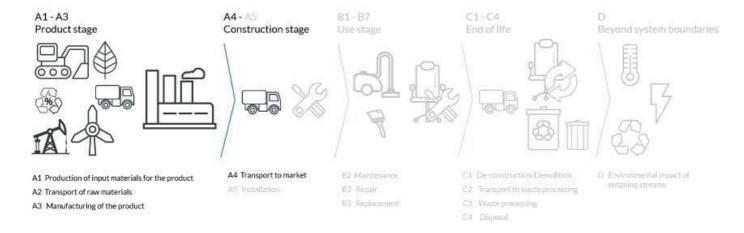

Additional technical information:



LCA: Scenarios and additional technical information

The following information describe the scenarios in the different modules of the EPD.

The product is shipped to consumer in Kinnarps' trucks with blankets and cardboard sheets as packaging material which is returned to the factory after delivery and reused. This method saves 270 kg of packaging material per container and enables 50% more products to be transported in each truck. Kinnarps' trucks have a load efficiency of over 90% and are run on diesel with renewable content. For more information about sustainability at Kinnarps, visit https://www.kinnarps.com/about-kinnarps/sustainability/.

Transport from production place to user (A4)

Туре	Capacity utilisation (incl. return) %	Type of vehicle	Distance km	Fuel/Energy consumption	Unit	Value (I/t)						
Truck 36,7 %		Truck, 16-32 tonnes, HVO, EURO 6 (kgkm) - RER	300	0,043113	l/tkm	12,93						
Railway					l/tkm							
Boat					l/tkm							
Other Transportation					l/tkm							

Use (B1)

	Unit	Value
Auxiliary	kg	
Water consumption	m ³	
Electricity consumption	kWh	
Other energy carriers	MJ	
Material loss	kg	
Output materials fr ste treatment	kg	

kg

kg

Oilit	Valu

Maintenance (B2)/Repair (B3)

Dust in the air

VOC emissions

	Unit	Value
Maintenance cycle*	OCO	
Auxiliary	Char.	
Other resources	4/10)
Water consumption	Scenario	36 C
Electricity consumption	kWh	.16
Other energy carriers	MJ	
Material loss	kg	
VOC emissions	kg	

Replacement (B4)/Returbishment (B5)							
	l						

ectricity consumption	Unit	Value
Replacement cycle*		
Electricity consumption	kWh	
Replacement of worn parts		

* Described above if relevant

Operational energy (B6) and water consumption (B7)

	Unit	Value
Water consumption	m ³	
Electricity consumption	kWh	
Other energy carriers	MJ	
Power output of equipment	kW	

Described above if relevant		
1		
47.		
Ad		
r are		
End of Life (C1)		
End of Life (C1, C		
		11-1
· · · · · · · · · · · · · · · · · · ·	Unit	Value
Hazardous waste disposed	Unit kg	Value
Hazardous waste disposed Collected as mixed construction was		Value
Hazardous waste disposed Collected as mixed construction was.	kg	Value
Hazardous waste disposed Collected as mixed construction was Reuse Recycling	kg kg	Value
Hazardous waste disposed Collected as mixed construction was Reuse Recycling Energy recovery	kg kg	Value
End of Life (C1, C) OF INC/UO CO COLOR Reuse Recycling Energy recovery To landfill	kg kg	Value

Transport to waste processing (C2)

Туре	Capacity utilisation (incl. return) %	Type of vehicle	Distance km	Fuel/Energy consumption	Unit	Value (I/t)
Truck					I/tkm	
Railway					I/tkm	
Boat					I/tkm	
Other Transportation					I/tkm	



LCA: Results

The LCA results are presented below for the declared unit defined on page 2 of the EPD document.

System boundaries (X=included, MND=module not declared, MNR=module not relevant)

Pro	Product stage Construction installation stage			User stage End of life stage						•	Beyond the system bondaries					
Raw materials	Transport	Manufacturing	Transport	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De- construction demolition	Transport	W aste processing	Disposal	Reuse-Recovery- Recycling- potential
A1	A2	A3	A4	A5	B1	B2	В3	B4	B5	В6	В7	C1	C2	C3	C4	. D
Х	Х	Χ	Χ	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND	MNR	MND	. MND

Environmental impact

Parameter	Unit	A1	A2	A3	A4
GWP	kg CO ₂ -eq	7,74E+01	9,48E-01	2,95E+00	2,04E-01
ODP	kg CFC11 -eq	2,64E-06	1,67E-07	3,53E-06	3,29E-08
POCP	kg C ₂ H ₄ -eq	2,81E-02	2,36E-04	3,58E-03	7,47E-05
AP	kg SO ₂ -eq	3,98E-01	5,33E-03	1,44E-02	8,29E-04
EP	kg PO ₄ ³⁻ -eq	6,92E-02	6,55E-04	2,96E-03	1,23E-04
ADPM	kg Sb -eq	1,10E-03	1,77E-05	5,73E-05	2,59E-05
ADPE	MJ	8,12E+02	1,42E+01	2,75E+01	4,13E+00

GWP Global warming potential; ODP Depletion potential of the stratospheric ozone layer, POCP Formation potential of tropospheric photochemical oxidants; AP Acidification potential of land and water, EP Eutrophication potential; ADPM Abiotic depletion potential for non fossil resources; ADPE Abiotic depletion potential for fossil resources

Reading example: 9.0 E-03 = 9.0*10-3 = 0.009

*INA Indicator Not Assessed



Resource use Parameter Unit Α1 A2 А3 RPEE 9,19E+01 3,10E-01 1,29E+02 2,04E-01 MJ RPEM 0,00E+00 0,00E+00 MJ 1,22E+01 0,00E+00 TPE MJ 1,04E+02 3,10E-01 1,29E+02 2,04E-01 NRPE MJ 1,48E+01 4,65E+02 4,51E+00 9,66E+02 NRPM MJ 0,00E+00 0,00E+00 0,00E+00 1,65E+02 TRPE 4,65E+02 4,45E+00 MJ 1,13E+03 1,47E+01 9,80E-03 SM 2,42E-01 kg 3,95E+00 1,43E-01 RSF MJ 0,00E+004,13E-03 3,31E-02 6,63E-03 NRSF MJ 0,00E+00 1,42E-02 3,55E-01 2,29E-02 W 1,71E-01 1,84E-03 m^3 6,17E-01 3,29E-03

RPEE Renewable primary energy resources used as energy carrier; RPEM Renewable primary energy resources used as raw materials; TPE Total use of renewable primary energy resources; NRPE Non renewable primary energy resources used as energy carrier; NRPM Non renewable primary energy resources used as materials; TRPE Total use of non renewable primary energy resources; SM Use of secondary materials; RSF Use of renewable secondary fuels; NRSF Use of non renewable secondary fuels; W Use of net fresh water

Reading example: 9.0 E-03 = 9.0*10-3 = 0.009

*INA Indicator Not Assessed

End of life - Waste

Parameter	Unit	A1	A2	A3	A4
HW	kg	1,40E-02	4,07E-04	1,51E-01	6,32E-04
NHW	kg	4,86E+01	1,02E+00	1,30E+00	6,70E-01
RW	kg	INA*	INA*	INA*	INA*

HW Hazardous waste disposed; NHW Non hazardous waste disposed; RW Radioactive waste disposed

Reading example: 9.0 E-03 = 9.0*10-3 = 0.009

*INA Indicator Not Assessed

End of life - Output flow

Parameter	Unit	A1	A2	A3	A4
CR	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00
MR	kg	0,00E+00	2,70E-03	3,52E+00	4,33E-03
MER	kg	8,15E-04	4,77E-05	1,88E-03	7,69E-05
EEE	MJ	INA*	INA*	INA*	INA*
ETE	MJ	INA*	INA*	INA*	INA*

CR Components for reuse; MR Materials for recycling; MER Materials for energy recovery; EEE Exported electric energy; ETE Exported thermal energy

Reading example: 9.0 E-03 = 9.0*10-3 = 0.009

*INA Indicator Not Assessed



Additional Norwegian requirements

Greenhouse gas emissions from the use of electricity in the manufacturing phase

National production mix from import, low voltage (production of transmission lines, in addition to direct emissions and losses in grid) of applied electricity for the manufacturing process (A3).

Electricity mix	Data source	Amount	Unit
Energy, district heating, Norwegian average (kWh)	Østfoldforskning	19,71	g CO2-ekv/kWh
Energy, electricity, nuclear, Sweden: 1 kWh	Modified ecoinvent 3.6	22,11	g CO2-ekv/kWh

Dangerous substances

The product contains substances given by the REACH Candidate list and the Norwegian priority list that are less than 0,1 % by weight.

Indoor environment

The product is low-emitting and tested according to Swedish Möbelfakta.

Additional environmental information

Key environmental indicators for variants for this EPD: Cradle to Gate analyse from A1 to A3

Variant number	Global warming (kg CO2)	Total energy use (MJ)	Share of recycled material in product(%)
Plus[6]/[8] - Task Chair Plus [6], 6770 with polyester fabric and plastic starbase	73,39	1 559,32	25,36
Plus[6]/[8] - Task Chair Plus [6], 6770 with wool blend fabric and aluminum starbase	74,67	1 585,16	31,96
Plus[6]/[8] - Task Chair Plus [8], 8770 with wool blend fabric and plastic starbase	81,91	1 681,40	21,47
Plus[6]/[8] - Task Chair Plus [6], 6780 with wool blend fabric and plastic starbase	82,65	1 712,83	21,37
Plus[6]/[8] - Task Chair Plus [6], 6780 with polyester fabric and plastic starbase	74,71	1 593,85	25,06
Plus[6]/[8] - Task Chair Plus [8], 8780 with polyester fabric and plastic starbase	74,75	1 598,40	25,08
Plus[6]/[8] - Task Chair Plus [8], 8780 with wool blend fabric and plastic starbase	82,67	1 703,56	21,37
Plus[6]/[8] - Task Chair Plus [8], 8770 with polyester fabric and plastic starbase	74,01	1 571,16	25,22

Key environmental indicators for options for this EPD: Cradle to Gate analyse from A1 to A3

Option number	Global warming (kg CO2)	Total energy use (MJ)	Share of recycled material in product(%)	
Headrest N78	9,62	175,93	30,29	
Armrest 2, pair	9,92	155,05	0,00	
Armrest 4, pair	12,82	212,37	0,80	

Bibliography

ISO 14025:2010 Environmental labels and declarations - Type III environmental declarations - Principles and procedures.

ISO 14044:2006 Environmental management - Life cycle assessment - Requirements and guidelines.

EN 15804:2012+A1:2013 Environmental product declaration - Core rules for the product category of construction products.

ISO 21930:2017 Sustainability in buildings and civil engineering works - Core rules for environmental product declarations of construction products.

ecoinvent v3, Allocation, cut-off by classification, Swiss Centre of Life Cycle Inventories.

 $lversen\ et\ al.,\ (2018)\ eEPD\ v3.0\ -\ Background\ information\ for\ EPD\ generator\ system.\ LCA. no\ report\ number\ 04.18$

Vold et al., (2019) EPD generator for Norsk Industri, Background information for industry application and LCA data, LCA.no report number 06.19.

NPCR Part A: Construction products and services. Ver. 1.0. April 2017, EPD-Norge.

NPCR 026 Part B for Furniture. Ver. 2.0 October 2018, EPD-Norge.

© epd-norway	Program operator and publisher The Norwegian EPD Foundation Post Box 5250 Majorstuen, 0303 Oslo,Norway	Phone: e-mail: web:	+47 23 08 80 00 post@epd-norge.no www.epd-norge.no
Kinnarps_	Owner of the declaration	Phone:	+46 515 381 21
	Kinnarps AB	e-mail:	johanna.ljunggren@kinnarps.se
	Industrigatan 521 88 Kinnarp	web:	kinnarps.com
(LCA)	Author of the Life Cycle Assessment	Phone:	+47 916 50 916
	LCA.no AS	e-mail:	post@lca.no
	Dokka 6B 1671 Kråkerøy	web:	www.lca.no
LCA	Developer of EPD generator	Phone:	+47 916 50 916
	LCA.no AS	e-mail:	post@lca.no
	Dokka 1C 1671 Kråkerøy	web:	www.lca.no