



# Environmental product declaration

in accordance with ISO 14025 and EN 15804+A2

Thermoplastic road marking material E 150 P5





The Norwegian EPD Foundation

## Owner of the declaration:

Svevia AB

#### **Product**

Thermoplastic road marking material E 150 P5

#### **Declared unit:**

1 kg

# This declaration is based on Product Category Rules:

CEN Standard EN 15804:2012+A2:2019 serves as core PCR

NPCR 009:2021 Part B for Technical - Chemical products for building and construction industry

## Program operator:

The Norwegian EPD Foundation

#### **Declaration number:**

NEPD-6524-5783-EN

# Registration number:

NEPD-6524-5783-EN

Issue date: 07.05.2024

Valid to: 07.05.2029

#### **EPD** software:

LCAno EPD generator ID: 204613



#### **General information**

#### Product

Thermoplastic road marking material E 150 P5

#### **Program operator:**

The Norwegian EPD Foundation
Post Box 5250 Majorstuen, 0303 Oslo, Norway

Phone: +47 977 22 020 web: www.epd-norge.no

#### **Declaration number:**

NEPD-6524-5783-EN

#### This declaration is based on Product Category Rules:

CEN Standard EN 15804:2012+A2:2019 serves as core PCR NPCR 009:2021 Part B for Technical - Chemical products for building and construction industry

#### Statement of liability:

The owner of the declaration shall be liable for the underlying information and evidence. EPD Norway shall not be liable with respect to manufacturer information, life cycle assessment data and evidences.

#### **Declared unit:**

1 kg Thermoplastic road marking material E 150 P5

#### **Declared unit with option:**

A1,A2,A3,A4

#### Functional unit:

## General information on verification of EPD from EPD tools:

Independent verification of data, other environmental information and the declaration according to ISO 14025:2010, § 8.1.3 and § 8.1.4. Verification of each EPD is made according to EPD-Norway's guidelines for verification and approval requiring that tools are i) integrated into the company's environmental management system, ii) the procedures for use of the EPD tool are approved by EPD-Norway, and iii) the process is reviewed annually by an independent third party verifier. See Appendix G of EPD-Norway's General Programme Instructions for further information on EPD tools

#### **Verification of EPD tool:**

Independent third party verification of the EPD tool, background data and test-EPD in accordance with EPDNorway's procedures and guidelines for verification and approval of EPD tools. NEPDT73

Third party verifier:

Linda Høibye, Life Cycle Assessment Consulting

(no signature required)

#### Owner of the declaration:

Svevia AB

Contact person: Martin Gunnarsson

Phone:

e-mail: martin.gunnarsson@svevia.se

#### Manufacturer:

Svevia AB Flemminggatan 20 112 26 Stockholm, Sweden

#### Place of production:

Svevia AB Termoplast Fångögatan 2 582 78 Linköping, Sweden

#### Management system:

ISO 9001 and ISO 14001

#### **Organisation no:**

SE556768984801

#### Issue date:

07.05.2024

#### Valid to:

07.05.2029

#### Year of study:

2022

#### **Comparability:**

EPD of construction products may not be comparable if they not comply with EN 15804 and seen in a building context.

#### **Development and verification of EPD:**

The declaration is created using EPD tool lca.tools ver EPD2022.03, developed by LCA.no. The EPD tool is integrated in the company's management system, and has been approved by EPD Norway. Approval number: NEPDT94.

Developer of EPD: Martin Gunnarsson

Reviewer of company-specific input data and EPD: Ramadhani Hakizimana

## Approved:

Håkon Hauan

Managing Director of EPD-Norway



#### **Product**

# **Product description:**

White thermoplastic road marking material for extrusion application. E 150 P5 is certified at NordicCerts Norwegian test site with certification class P5.

#### **Product specification**

White extrusion material.

Materials	kg	%
Additives	0,01	0,50
Binder	0,18	18,40
Filler	0,35	35,10
Glass beads	0,40	40,00
Pigments	0,06	6,00
Total	1,00	100,00
Packaging	kg	%
Packaging - Pallet	0,03	95,85
Packaging - Plastic	0,00	4,15
Total incl. packaging	1,03	100,00

#### **Technical data:**

#### Market:

Sweden, Norway, Finland, Iceland and Estonia.

#### Reference service life, product

Not relevant

## Reference service life, building

Not relevant

## LCA: Calculation rules

#### **Declared unit:**

1 kg Thermoplastic road marking material E 150 P5

#### **Cut-off criteria:**

All major raw materials and all the essential energy is included. The production processes for raw materials and energy flows with very small amounts (less than 1%) are not included. These cut-off criteria do not apply for hazardous materials and substances.

#### **Allocation:**

The allocation is made in accordance with the provisions of EN 15804. Incoming energy and water and waste production in-house is allocated equally among all products through mass allocation. Effects of primary production of recycled materials is allocated to the main product in which the material was used. The recycling process and transportation of the material is allocated to this analysis.

#### Data quality:

Specific data for the product composition are provided by the manufacturer. The data represent the production of the declared product and were collected for EPD development in the year of study. Background data is based on EPDs according to EN 15804 and different LCA databases. The data quality of the raw materials in A1 is presented in the table below.


Materials	Source	Data quality	Year
Additives	ecoinvent 3.6	Database	2019
Binder	ecoinvent 3.6	Database	2019
Binder	ecoinvent 3.6	Database	2020
Binder	econinvent 3.6	Database	2020
Filler	ecoinvent 3.6	Database	2019
Glass beads	Supplier	LCA	2022
Packaging - Pallet	Modified ecoinvent 3.6	Database	2019
Packaging - Plastic	ecoinvent 3.6	Database	2019
Packaging - Plastic	Modified ecoinvent 3.6	Database	2019
Pigments	ecoinvent 3.6	Database	2019



# System boundaries (X=included, MND=module not declared, MNR=module not relevant)

Р	roduct stag	ge		Construction Use stage End of life stage			Use stage			Beyond the system boundaries						
Raw materials	Transport	Manufacturing	Transport	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De- construction demolition	Transport	Waste processing	Disposal	Reu se-Recovery- Recycling-potential
A1	A2	A3	A4	A5	В1	B2	В3	B4	В5	В6	В7	C1	C2	C3	C4	D
Х	Χ	Χ	X	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND

### System boundary:

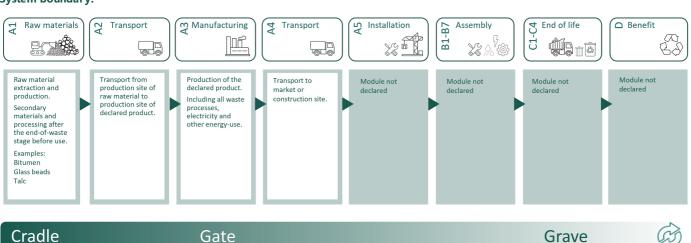

Additional technical information:



# LCA: Scenarios and additional technical information

The following information describe the scenarios in the different modules of the EPD.

Transport from production place to user (A4)	Capacity utilisation (incl. return) %	Distance (km)	Fuel/Energy Consumption	Unit	Value (Liter/tonne)
Truck, unspecified (km) - Europe	48,7 %	300	0,051	l/tkm	15,30



#### **LCA: Results**

The LCA results are presented below for the declared unit defined on page 2 of the EPD document.

Environmen	tal impact					
	Indicator	Unit	A1	A2	А3	A4
	GWP-total	kg CO <sub>2</sub> -eq	1,26E+00	1,43E-01	2,36E-03	4,07E-02
	GWP-fossil	kg CO <sub>2</sub> -eq	1,26E+00	1,43E-01	2,11E-03	4,06E-02
	GWP-biogenic	kg CO <sub>2</sub> -eq	6,67E-05	5,92E-05	2,34E-04	1,74E-05
	GWP-luluc	kg CO <sub>2</sub> -eq	4,42E-04	5,50E-05	1,44E-05	1,44E-05
<b>©</b>	ODP	kg CFC11 -eq	1,44E-07	3,23E-08	2,87E-10	9,26E-09
E	АР	mol H+ -eq	1,11E-02	1,17E-03	1,00E-05	2,32E-04
<del></del>	EP-FreshWater	kg P -eq	3,46E-05	1,12E-06	2,05E-08	3,34E-07
<del></del>	EP-Marine	kg N -eq	8,74E-04	3,70E-04	4,37E-06	8,28E-05
<del></del>	EP-Terrestial	mol N -eq	9,24E-03	4,09E-03	4,43E-05	9,13E-04
	POCP	kg NMVOC -eq	4,33E-03	1,14E-03	1,20E-05	2,61E-04
	ADP-minerals&metals <sup>1</sup>	kg Sb-eq	1,43E-05	3,45E-06	1,16E-08	1,05E-06
	ADP-fossil <sup>1</sup>	MJ	2,43E+01	2,16E+00	3,73E-02	6,24E-01
<u>^</u>	WDP <sup>1</sup>	m <sup>3</sup>	2,34E+01	1,92E+00	2,62E+00	5,91E-01

GWP-total = Global Warming Potential total; GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment: EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted water consumption

## **Remarks to environmental impacts**

<sup>&</sup>quot;Reading example: 9,0 E-03 = 9,0\*10-3 = 0,009"

<sup>\*</sup>INA Indicator Not Assessed

<sup>1.</sup> The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator



Additional enviro	Additional environmental impact indicators									
	Indicator	Unit	A1	A2	A3	A4				
	PM	Disease incidence	5,07E-08	1,18E-08	2,23E-10	3,70E-09				
() (d)	IRP <sup>2</sup>	kgBq U235 -eq	3,21E-02	9,42E-03	9,31E-04	2,73E-03				
	ETP-fw <sup>1</sup>	CTUe	1,79E+01	1,59E+00	2,51E-02	4,66E-01				
42.* *** <b>2</b>	HTP-c <sup>1</sup>	CTUh	2,73E-09	0,00E+00	0,00E+00	0,00E+00				
48° B	HTP-nc <sup>1</sup>	CTUh	9,61E-09	1,97E-09	2,50E-11	6,17E-10				
	SQP <sup>1</sup>	dimensionless	6,26E+00	1,72E+00	1,38E-02	5,34E-01				

PM = Particulate Matter emissions; IRP = Ionizing radiation – human health; ETP-fw = Eco toxicity – freshwater; HTP-c = Human toxicity – cancer effects; HTP-nc = Human toxicity – non cancer effects; SQP = Potential Soil Quality Index (dimensionless)

<sup>&</sup>quot;Reading example: 9,0 E-03 = 9,0\*10-3 = 0,009" \*INA Indicator Not Assessed

<sup>1.</sup> The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator

<sup>2.</sup> This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator.



Resource use						
	Indicator	Unit	A1	A2	A3	A4
	PERE	MJ	1,16E+00	2,97E-02	1,25E-02	8,95E-03
	PERM	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00
<b>્રાં</b> ક	PERT	MJ	1,16E+00	2,97E-02	1,25E-02	8,95E-03
	PENRE	MJ	2,04E+01	2,16E+00	3,74E-02	6,24E-01
	PENRM	MJ	5,55E+00	0,00E+00	0,00E+00	0,00E+00
<b>IA</b>	PENRT	MJ	2,60E+01	2,16E+00	3,74E-02	6,24E-01
	SM	kg	1,07E-02	0,00E+00	0,00E+00	0,00E+00
	RSF	MJ	2,05E-02	1,04E-03	5,06E-05	3,18E-04
	NRSF	MJ	8,43E-03	3,95E-03	1,76E-04	1,12E-03
<b>%</b>	FW	m <sup>3</sup>	1,99E-02	2,34E-04	3,12E-05	7,06E-05

PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non renewable primary energy resources used as raw materials; PENRM = Use of non renewable primary energy resources; SM = Use of secondary materials; RESF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Net use of fresh water

<sup>&</sup>quot;Reading example: 9,0 E-03 = 9,0\*10-3 = 0,009" \*INA Indicator Not Assessed



	End of life - Waste						
Indicator			Unit	A1	A2	A3	A4
	ā	HWD	kg	1,91E-03	1,14E-04	4,43E-04	3,36E-05
	Ū	NHWD	kg	3,60E-01	1,24E-01	9,35E-04	3,87E-02
		RWD	kg	3,81E-05	1,47E-05	4,66E-07	4,24E-06

HWD = Hazardous waste disposed; NHWD = Non-hazardous waste disposed; RWD = Radioactive waste disposed

"Reading example: 9,0 E-03 = 9,0\*10-3 = 0,009" \*INA Indicator Not Assessed

End of life - Output flow									
Indicator	Unit	A1	A2	A3	A4				
<b>@</b> >	CRU	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00			
⇔>	MFR	kg	0,00E+00	0,00E+00	5,06E-04	0,00E+00			
D₽	MER	kg	0,00E+00	0,00E+00	2,02E-03	0,00E+00			
<b>₽</b> D	EEE	MJ	0,00E+00	0,00E+00	1,22E-03	0,00E+00			
D	EET	MJ	0,00E+00	0,00E+00	1,85E-02	0,00E+00			

CRU = Components for re-use; MFR = Materials for recycling; MER = Materials for energy recovery; EEE = Exported energy electrical; EET = Exported energy thermal

"Reading example: 9,0 E-03 = 9,0\*10-3 = 0,009" \*INA Indicator Not Assessed

Biogenic Carbon Content							
Unit	At the factory gate						
kg C	0,00E+00						
kg C	0,00E+00						
	kg C						

Note: 1 kg biogenic carbon is equivalent to 44/12 kg CO2



# **Additional requirements**

## Greenhouse gas emissions from the use of electricity in the manufacturing phase

National production mix from import, low voltage (production of transmission lines, in addition to direct emissions and losses in grid) of applied electricity for the manufacturing process (A3).

Electricity mix	Source	Amount	Unit
Electricity, Sweden (kWh)	ecoinvent 3.6	54,94	g CO2-eg/kWh

#### **Dangerous substances**

The product contains no substances given by the REACH Candidate list.

#### **Indoor environment**

## **Additional Environmental Information**

Additional environmental impact indicators required in NPCR Part A for construction products								
Indicator	Unit	A1	A2	A3	A4			
GWPIOBC	kg CO <sub>2</sub> -eq	7,74E-01	1,43E-01	2,33E-03	4,07E-02			

GWP-IOBC: Global warming potential calculated according to the principle of instantaneous oxidation. In order to increase the transparency of biogenic carbon contribution to climate impact, the indicator GWP-IOBC is required as it declares climate impacts calculated according to the principle of instantaneous oxidation. GWP-IOBC is also referred to as GWP-GHG in context to Swedish public procurement legislation.



## **Bibliography**

ISO 14025:2010 Environmental labels and declarations - Type III environmental declarations - Principles and procedures.

ISO 14044:2006 Environmental management - Life cycle assessment - Requirements and guidelines.

EN 15804:2012 + A2:2019 Environmental product declaration - Core rules for the product category of construction products.

ISO 21930:2017 Sustainability in buildings and civil engineering works - Core rules for environmental product declarations of construction products.

ecoinvent v3, (2019) Allocation, cut-off by classification, Swiss Centre of Life Cycle Inventories.

Iversen et al., (2021) eEPD v2021.09 Background information for EPD generator tool system verification, LCA.no Report number: 07.21 Graafland, J. and Ruttenborg, M. (2023) EPD generator for NPCR009:2021, Part B for Technical - Chemical products (non-cement based products), Background information for EPD generator application and LCA data, LCA.no report number: 12.23.

NPCR Part A: Construction products and services. Ver. 2.0, 24.03.2021 EPD Norway.

NPCR 009 Part B for Technical - Chemical products for building and construction industry, Ver. 3.0, 06.10.2021, EPD Norway.

@ and narway	Program operator and publisher	Phone: +47 977 22 020
© epd-norway	The Norwegian EPD Foundation	e-mail: post@epd-norge.no
Global Program Operator	Post Box 5250 Majorstuen, 0303 Oslo, Norway	web: www.epd-norge.no
	Owner of the declaration:	Phone:
SVEVIA	Svevia AB	e-mail: martin.gunnarsson@svevia.se
	Flemminggatan 20, 112 26 Stockholm	web: https://www.svevia.se/
	Author of the Life Cycle Assessment	Phone: +47 916 50 916
(LCA)	LCA.no AS	e-mail: post@lca.no
.no	Dokka 6B, 1671	web: www.lca.no
	Developer of EPD generator	Phone: +47 916 50 916
(LCA)	LCA.no AS	e-mail: post@lca.no
	Dokka 6B,1671 Kråkerøy	web: www.lca.no
ECO PLATFORM	ECO Platform	web: www.eco-platform.org
VERIFIED	ECO Portal	web: ECO Portal
CATTED		